


PIN BUSBAR,  
16 SQMM CONNECTION: 2X(2-PHASE+HS/FS) SAFE-TO-TOUCH

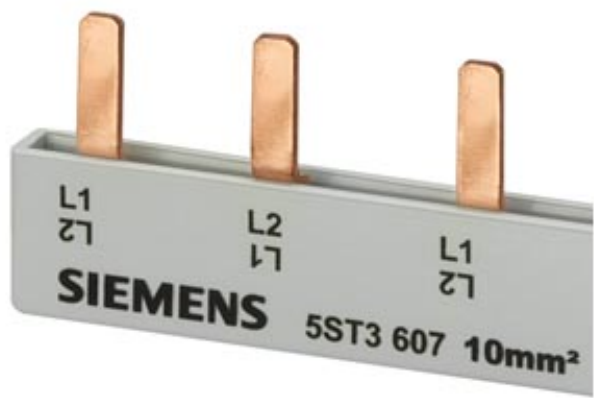

Similar to image

### Technical data:

|                                 |    |            |
|---------------------------------|----|------------|
| Busbar design                   |    | laminated  |
| Length                          | mm | 75.5       |
| Width                           | mm | 7.3        |
| Operating current / rated value | A  | 80         |
| Thickness / of busbar           | mm | 19         |
| Material / of the busbar        |    | SF-Cu F 24 |
| Product property / flexible     |    | No         |
| Traitement de surface / étamé   |    | No         |

### Certificates/approvals:

|                          |       |
|--------------------------|-------|
| General Product Approval | other |
|--------------------------|-------|




[other](#)

### Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

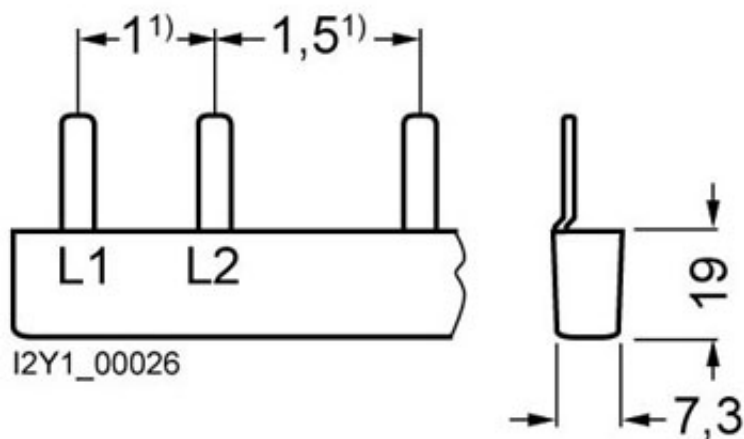

<sup>1)</sup> Pin spacings in MW (Modular widths, 1 MW = 18 mm).

last change:

Nov 29, 2012