


PIN BUSBAR,  
16 SQMM CONNECT.: 3X(3X(1XPHASE+HS/FS)) SAFE-TO  
-TOUCH

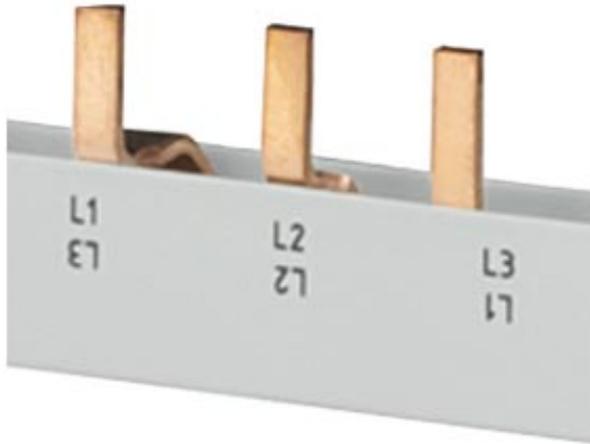

Similar to image

#### Technical data:

<b>Busbar design</b>		laminated
<b>Length</b>	mm	245
<b>Width</b>	mm	10.3
<b>Operating current / rated value</b>	A	80
<b>Thickness / of busbar</b>	mm	19
<b>Material / of the busbar</b>		SF-Cu F 24
<b>Product property / flexible</b>		No
<b>Traitement de surface / étamé</b>		No

#### Certificates/approvals:

<b>General Product Approval</b>	other
---------------------------------	-------

[other](#)



#### Further information:

**Information- and Downloadcenter (Catalogs, Brochures,...)**

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<http://www.siemens.com/lowvoltage/mall>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)


<http://support.automation.siemens.com/WW/view/en/5ST3650/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

[http://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=5ST3650](http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5ST3650)

CAX-Online-Generator

<http://www.siemens.com/cax>

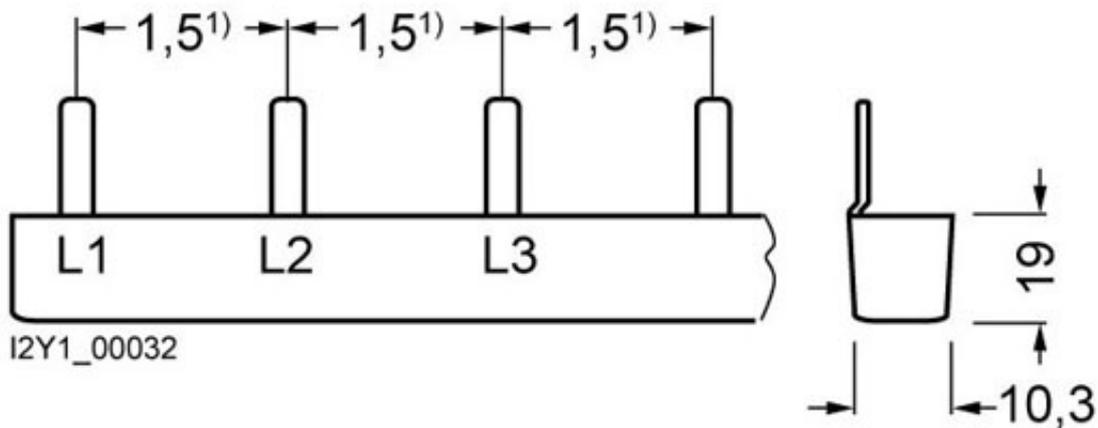

<sup>1)</sup> Pin spacings in MW (Modular widths, 1 MW = 18 mm).

last change:

Nov 29, 2012