


PIN BUSBAR, 16SQMM 16MW, 4PHASES,
SLICEABLE RCCB 4P N RIGHT AND 6 MCB 1P+N SAFE
TO TOUCH WITH END CAPS

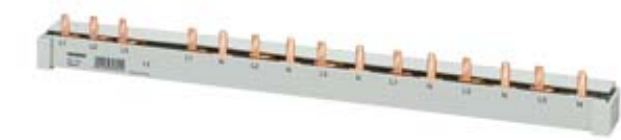

Similar to image

Technical data:		
product brand name		SETRON
Operating current / rated value	A	80
Busbar design		laminated
Traitement de surface / étamé		No
Material / of the busbar		SF-Cu F 24
Product property / flexible		Yes
Length	mm	292
Width	mm	23.7
Thickness / of busbar	mm	18.3
Net weight	g	201.95

Certificates/approvals:	
General Product Approval	other



[other](#)

Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://eb.automation.siemens.com/mall/en/WW/Catalog/Product/5ST3770-5>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)


<http://support.automation.siemens.com/WW/view/en/5ST3770-5/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5ST3770-5

CAX-Online-Generator

<http://www.siemens.com/cax>

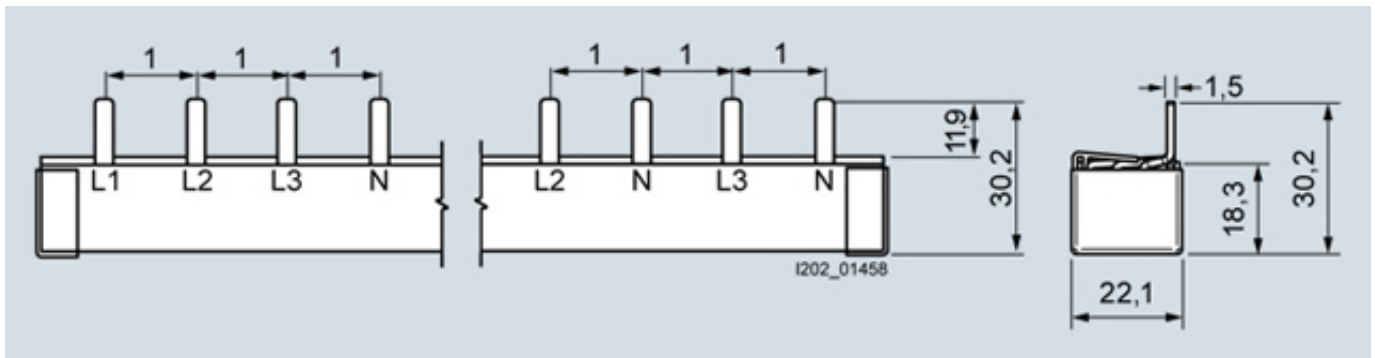

last change:

Jul 10, 2014