



Residual current operated circuit breaker, 2-pole, type A, In: 40 A, 30 mA, Un AC: 230 V, N left

| Model                                                                  |                                                                         |
|------------------------------------------------------------------------|-------------------------------------------------------------------------|
| product brand name                                                     | SENTRON                                                                 |
| product designation                                                    | RCCB                                                                    |
| design of the product                                                  | Instantaneous                                                           |
| product type designation                                               | 5SV3                                                                    |
| product variations                                                     | N left                                                                  |
| General technical data                                                 |                                                                         |
| number of poles                                                        | 2                                                                       |
| size of installation devices according to DIN 43880                    | 1                                                                       |
| mechanical service life (operating cycles) typical                     | 10 000                                                                  |
| short-circuit current of series fuse maximum permissible               | 63 A                                                                    |
| short-circuit current rating                                           | 10 kA                                                                   |
| switching function short-term delayed                                  | No                                                                      |
| overvoltage category                                                   | III                                                                     |
| tripping fault current rated value                                     | 30 mA                                                                   |
| Supply voltage                                                         |                                                                         |
| supply voltage for testing equipment minimum                           | 195 V                                                                   |
| value range of the supply voltage frequency                            | 50 Hz                                                                   |
| value range of the operating frequency                                 | 50 Hz                                                                   |
| value range of the supply voltage at AC                                | 230 V                                                                   |
| Protection class                                                       |                                                                         |
| protection class IP                                                    | IP20, if the distribution board is installed, with connected conductors |
| Breaking Capacity                                                      |                                                                         |
| switching capacity current                                             |                                                                         |
| • according to IEC 61008-1 rated value                                 | 0.5 kA                                                                  |
| grid spacing                                                           | 60 mm                                                                   |
| Dissipation                                                            |                                                                         |
| power loss [W]                                                         |                                                                         |
| • for rated value of the current at AC in hot operating state per pole | 2.6 W                                                                   |
| • maximum                                                              | 5.2 W                                                                   |
| Product details                                                        |                                                                         |
| product feature silicon-free                                           | Yes                                                                     |
| product extension installable supplementary devices                    | Yes                                                                     |
| Connections                                                            |                                                                         |
| connectable conductor cross-section solid                              |                                                                         |
| • minimum                                                              | 0.75 mm <sup>2</sup>                                                    |
| • maximum                                                              | 35 mm <sup>2</sup>                                                      |
| connectable conductor cross-section stranded                           |                                                                         |
| • minimum                                                              | 0.75 mm <sup>2</sup>                                                    |

|                                             |                    |
|---------------------------------------------|--------------------|
| • maximum                                   | 35 mm <sup>2</sup> |
| tightening torque with screw-type terminals |                    |
| • minimum                                   | 2.5 N·m            |
| • maximum                                   | 3 N·m              |
| position of power supply cord               | top or bottom      |

#### Mechanical Design

|                               |                |
|-------------------------------|----------------|
| height                        | 90 mm          |
| width                         | 36 mm          |
| depth                         | 70 mm          |
| installation depth            | 70 mm          |
| number of modular width units | 2              |
| fastening method              | DIN rail (REG) |
| mounting position             | any            |

#### Environmental conditions

|                                                                             |        |
|-----------------------------------------------------------------------------|--------|
| ambient temperature during operation                                        |        |
| • minimum                                                                   | -25 °C |
| • maximum                                                                   | 45 °C  |
| ambient temperature during storage minimum                                  | -40 °C |
| number of test cycles for environmental testing according to IEC 60068-2-30 | 28     |

#### Environmental footprint

|                                                                    |          |
|--------------------------------------------------------------------|----------|
| Environmental Product Declaration (EPD)                            | Yes      |
| Global Warming Potential [CO <sub>2</sub> eq] total                | 8.73 kg  |
| Global Warming Potential [CO <sub>2</sub> eq] during manufacturing | 1.32 kg  |
| Global Warming Potential [CO <sub>2</sub> eq] during operation     | 7.39 kg  |
| Global Warming Potential [CO <sub>2</sub> eq] after end of life    | 0.017 kg |

#### Approvals Certificates

##### General Product Approval



[Confirmation](#)



##### General Product Approval

##### Test Certificates

##### other

[Miscellaneous](#)

[Miscellaneous](#)



[Miscellaneous](#)

[Miscellaneous](#)

[Confirmation](#)

| Railway | Dangerous Good | Environment |
|---------|----------------|-------------|
|---------|----------------|-------------|

[Confirmation](#)

[Transport Information](#)

[EPD Typ II/III \(with life cycle assessment\)](#)

[Environmental Conformations](#)

#### Further information

Siemens has decided to exit the Russian market (see here).

<https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business>

Siemens is working on the renewal of the current EAC certificates.

Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus).

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)


<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=5SV3314-6KL>


Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/5SV3314-6KL>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

[http://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=5SV3314-6KL](http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5SV3314-6KL)

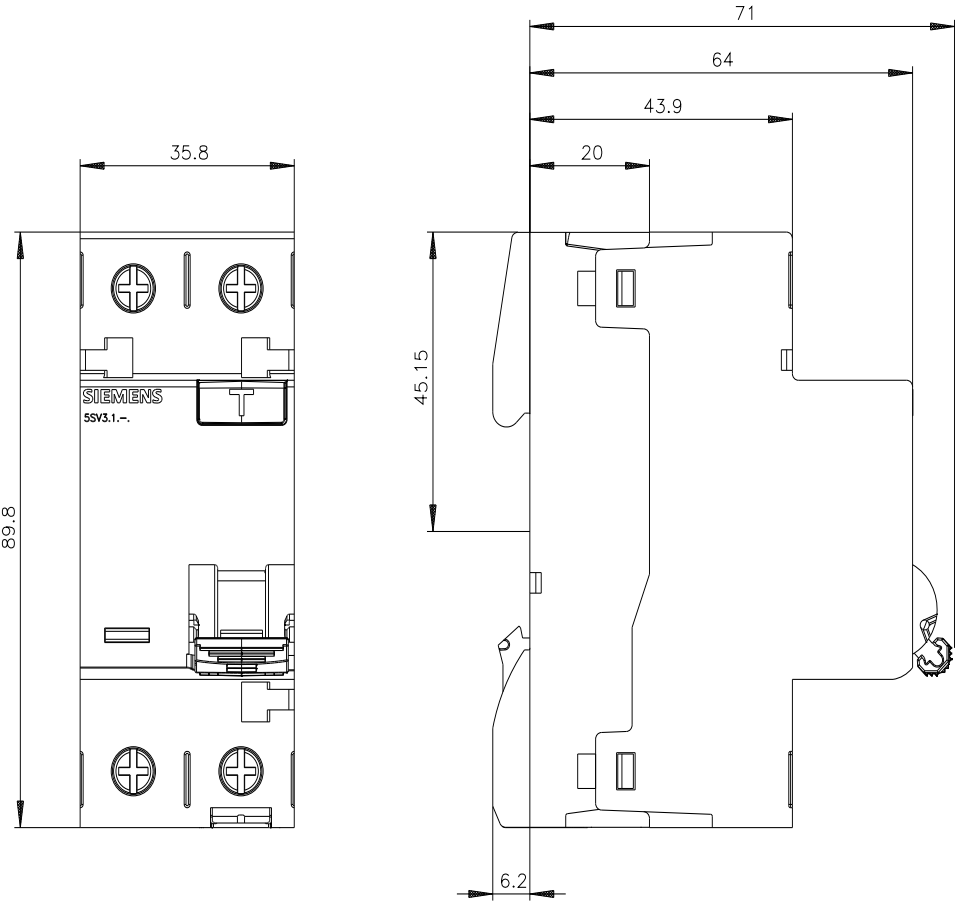

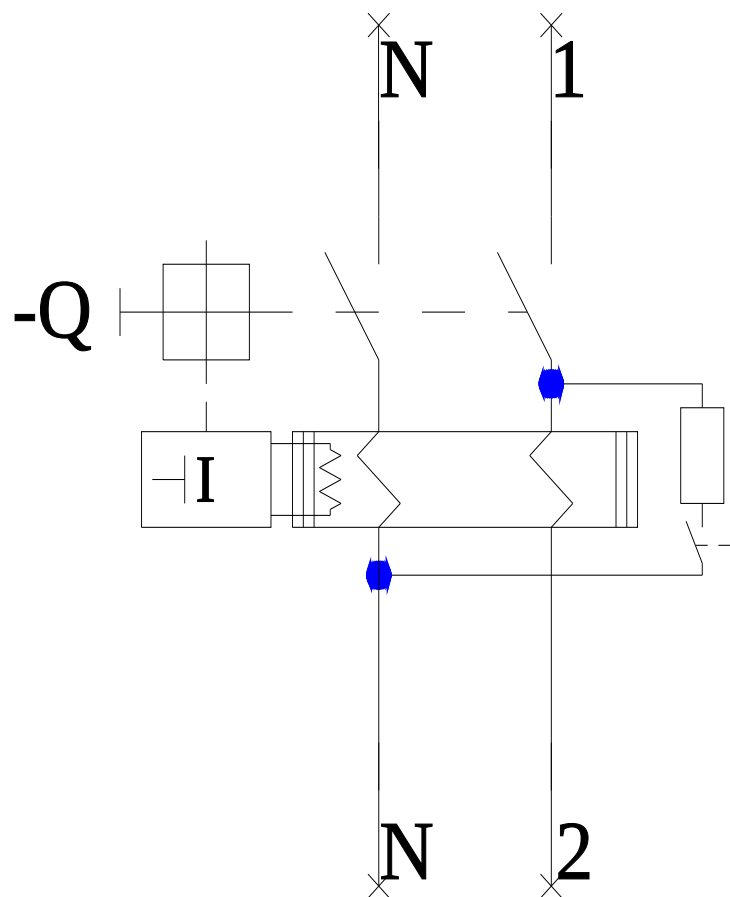

last modified:

11/3/2023 

