

RES.CUR.OP.CIRCUIT BREAKER TYPE AC 25A 1+N-
POLE 30MA 230V 2MW N-LEFT



Model		
product brand name		SETRON
Product designation		RCCB
Design of the product		Instantaneous
Product variations		N left

General technical data		
Number of poles		2
Size of installation devices / acc. to DIN 43880		1
Protection against electrical shock		Finger and back-of-hand safe
Short-circuit current rating	kA	10
circuit-breaker / Design		5SV4
Mechanical service life (switching cycles) / typical		10 000
Overvoltage category		III

Supply voltage		
Supply voltage		
• at AC / rated value	V	230
• for testing equipment / minimum	V	195
Supply voltage frequency		

• rated value		50Hz
Protection class		
Protection class IP		IP20, if the distribution board is installed, with connected conductors
Switching capacity		
Switching capacity current		
• acc. to EN 60898 / rated value	kA	0.5
Dissipation		
Power loss [W]		
• for rated value of the current / at AC / in hot operating state / per pole	W	1
• maximum	W	2
Electricity		
Tripping residual current / rated value	mA	30
rated current I _n / IEC, DIN/VDE / at 40 °C	A	25
Type of fault current		AC
Current / at AC / rated value	A	25
I²t-value / permissible	A ² ·s	15 620
Operating frequency		50/60Hz
Product details		
Product feature		
• halogen-free		Yes
• silicon-free		Yes
Product extension / can be installed / supplementary devices		Yes
Number		
Number of test cycles / for environmental testing / acc. to IEC 60068-2-30		28
Connections		
Connectable conductor cross-section / stranded		
• minimum	mm ²	0.75
• maximum	mm ²	35
Connectable conductor cross-section / solid		
• minimum	mm ²	0.75
• maximum	mm ²	35
Tightening torque / with screw-type terminals		
• minimum	N·m	2.5
• maximum	N·m	3
Position / of power supply cord		top or bottom
Mechanical Design		

Height	mm	90
Width	mm	36
Depth	mm	70
Mounting position		any
Installation depth	mm	70
Number of width units		2
Mounting type		DIN rail (REG)

Environmental conditions

Ambient temperature

• minimum	°C	-25
• maximum	°C	45
• during storage / minimum permissible	°C	-40
• during storage / maximum permissible	°C	75

Certificates

Equipment marking

• acc. to DIN EN 61346-2	F
• acc. to DIN EN 81346-2	F

General Product Approval

Declaration of Conformity



ÖVE



VDE



sonstig



EG-Konf.

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://eb.automation.siemens.com/mall/en/WW/Catalog/Product/5SV43120KL>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/5SV43120KL/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)



http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5SV43120KL

CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

<http://ausschreibungstexte.siemens.com/tiplv>

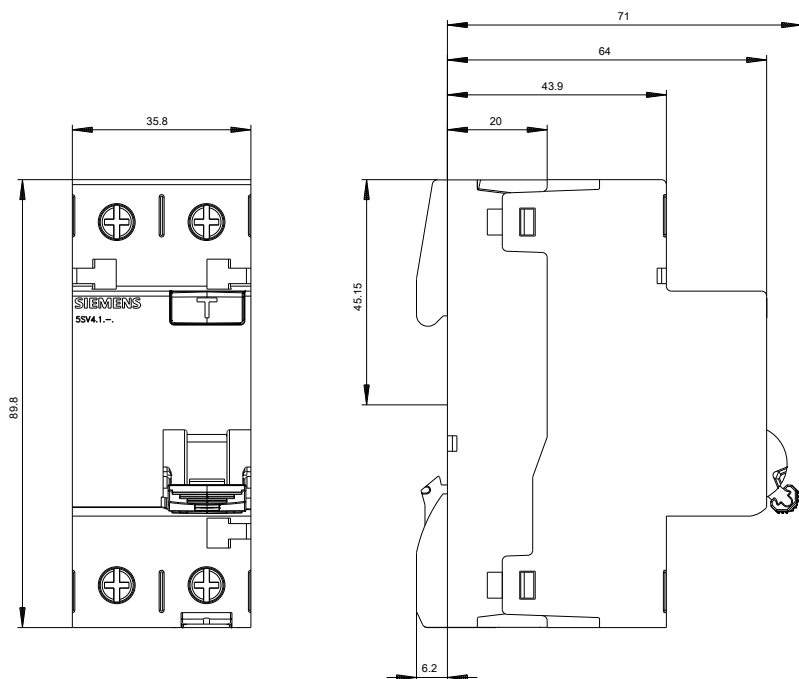

Siemens

5SV(3,4)x1x-x

Format / Size: Hybrid quer

last modified:

09.06.2016