



CIRCUIT BREAKER T55 400V, 6KA, 3-POLE,
B, 25A

General technical data:

type of voltage		AC/DC
Mounting depth	mm	55
Current / for AC / rated value	A	25
Tripping characteristic class		B
Supply voltage / for AC / rated value	V	400
Switching capacity current		
• in accordance with IEC 60947-2 / rated value	kA	10
• acc. to EN 60898 / rated value	kA	6
Number of pitch units for width		3
Degree of pollution		3
Overvoltage class		3

Certificates/approvals:

General Product Approval		Declaration of Conformity	Test Certificates		Shipping Approval
 CSA	 GOST	 EG-Konf.	Special Test Certificate	Type Test Certificates/Test Report	 LRS
other					

[other](#)

[Environmental Confirmations](#)

Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<http://www.siemens.com/lowvoltage/mall>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)


<http://support.automation.siemens.com/WW/view/en/5SX2325-6/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5SX2325-6

CAX-Online-Generator

<http://www.siemens.com/cax>

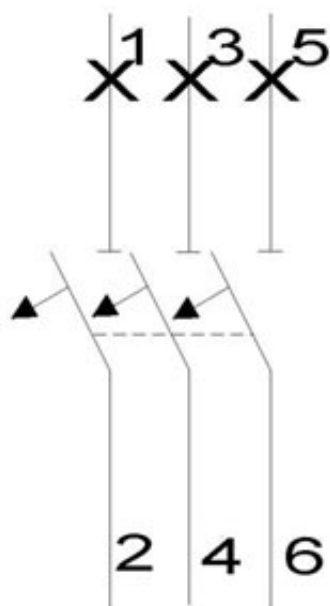

last change:

Sep 24, 2012