



CIRCUIT BREAKER 230/400V 10KA, 1-POLE, A, 32A, D=70MM

Similar to image

| Technical data:                                          |    |                       |
|----------------------------------------------------------|----|-----------------------|
| Type of mounting                                         |    | Quick assembly system |
| type of voltage                                          |    | AC/DC                 |
| Height                                                   | mm | 90                    |
| Width                                                    | mm | 18                    |
| Depth                                                    | mm | 76                    |
| mounting position                                        |    | any                   |
| Mounting depth                                           | mm | 70                    |
| Current / for AC / rated value                           | A  | 32                    |
| Tripping characteristic class                            |    | A                     |
| Supply voltage                                           |    |                       |
| • for AC / rated value                                   | V  | 400                   |
| • with single-phase operation / with AC / rated value    | V  | 230                   |
| • with multi-phase operation / with AC / rated value     | V  | 400                   |
| Switching capacity current                               |    |                       |
| • in accordance with IEC 60947-2 / rated value           | kA | 20                    |
| • with DC / in accordance with IEC 60947-2 / rated value | kA | 15                    |
| • acc. to EN 60898 / rated value                         | kA | 10                    |
| Breaking capacity short-circuit current (Icn)            |    |                       |

|                                                                                                  |                 |                                       |
|--------------------------------------------------------------------------------------------------|-----------------|---------------------------------------|
| • with DC / in accordance with EN 60898-2                                                        | kA              | 10                                    |
| • with AC / in accordance with UL 1077 and CSA C22.2 No.235                                      | kA              | 5                                     |
| <b>Active power loss / at rated value current / with AC / in warm operating state / per pole</b> | W               | 2.8                                   |
| <b>Number of pitch units for width</b>                                                           |                 | 1                                     |
| <b>Product feature / sealable</b>                                                                |                 | Yes                                   |
| <b>Degree of pollution</b>                                                                       |                 | 3                                     |
| <b>Ambient temperature</b>                                                                       | °C              | -25 ... +55                           |
| <b>Ambient temperature</b><br>• during storage                                                   | °C              | -40 ... +75                           |
| <b>Position / of power supply cord</b>                                                           |                 | Any                                   |
| <b>Product property / properties for main switches in accordance with EN 60204-1</b>             |                 | Yes                                   |
| <b>Mechanical operating cycles as operating time / typical</b>                                   |                 | 20,000                                |
| <b>Overvoltage class</b>                                                                         |                 | 3                                     |
| <b>Product equipment / touch-protection</b>                                                      |                 | Yes                                   |
| <b>Resistance against shock / according to IEC 60068-2-27</b>                                    |                 | 150m/s <sup>2</sup> at 11ms half-sine |
| <b>Insulation voltage</b><br>• with single-phase operation / with AC / rated value               | V               | 250                                   |
| • with multi-phase operation / with AC / rated value                                             | V               | 440                                   |
| <b>AWG number</b><br>• as encoded connectable conductor cross-section                            |                 | 14 ... 4                              |
| <b>Section de conducteur raccordable</b><br>• solid                                              | mm <sup>2</sup> | 0.75 ... 35                           |
| • multibrin                                                                                      | mm <sup>2</sup> | 0.75 ... 35                           |
| • finely stranded<br>• with wire end processing                                                  | mm <sup>2</sup> | 0.75 ... 25                           |
| <b>Product component</b><br>• combined terminal top                                              |                 | Yes                                   |
| • combined terminal bottom                                                                       |                 | Yes                                   |
| <b>Tightening torque</b><br>• with screw-type terminals                                          | N·m             | 2.5 ... 3                             |
| <b>Tightening torque (lbf·in)</b><br>• with screw connection                                     | lbf·in          | 22 ... 26                             |
| <b>Product feature</b><br>• [not supplied - silicon-free]                                        |                 | Yes                                   |
| • halogen-free                                                                                   |                 | Yes                                   |
| <b>Number of test cycles / for environmental testing / in accordance with IEC 60068-2-30</b>     |                 | 6                                     |
| <b>Item designation / according to DIN EN 61346-2</b>                                            |                 | F                                     |

## Certificates/approvals:

| General Product Approval                                                                 |                                                                                           |                                                                                         |                                                                                          | Declaration of Conformity                                                                       | Test Certificates                        |
|------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------|------------------------------------------|
| <br>CCC | <br>GOST | <br>UL | <br>VDE | <br>EG-Konf. | <a href="#">Special Test Certificate</a> |
| Shipping Approval                                                                        | other                                                                                     |                                                                                         |                                                                                          |                                                                                                 |                                          |
| <br>DNV | <a href="#">other</a>                                                                     |                                                                                         |                                                                                          |                                                                                                 |                                          |

## Further information:

### Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

### Industry Mall (Online ordering system)

<http://www.siemens.com/lowvoltage/mall>

### Service&Support (Manuals, Certificates, Characteristics, FAQs,...)



<http://support.automation.siemens.com/WW/view/en/5SY4132-5/all>

### Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

[http://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=5SY4132-5](http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5SY4132-5)

### CAX-Online-Generator

<http://www.siemens.com/cax>

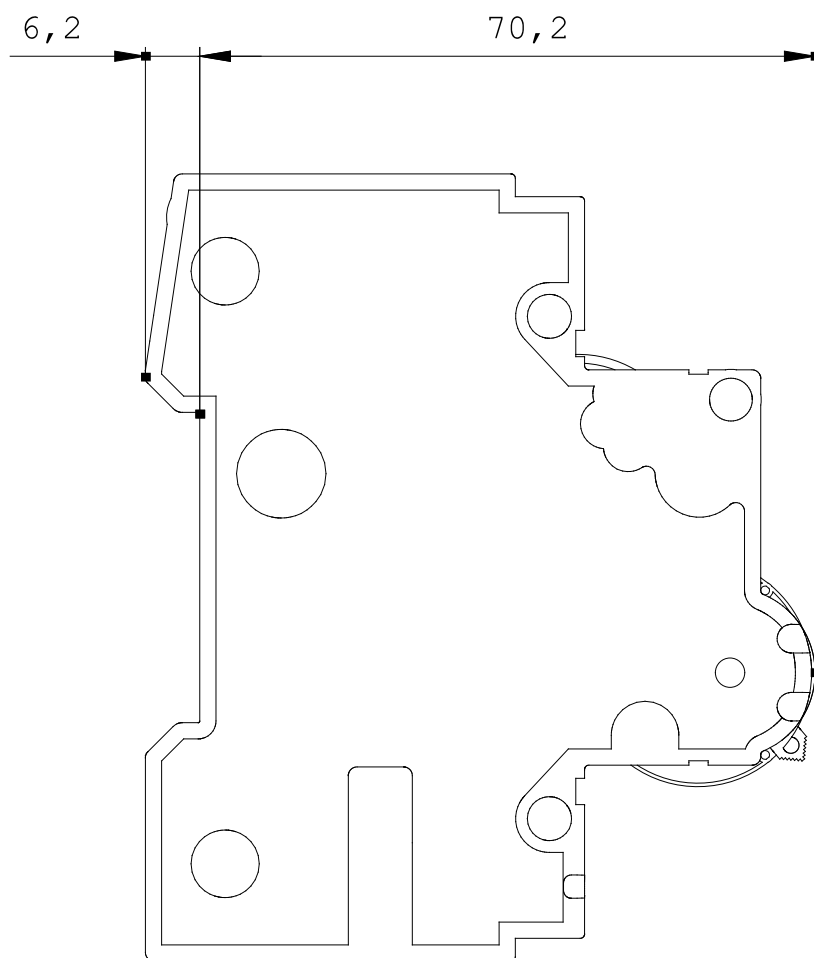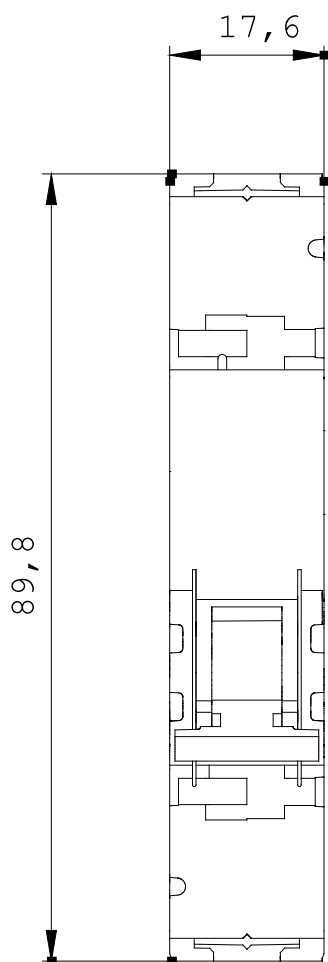

last change:

Dec 31, 2012