



DC DISCONNECTOR F. PV SYSTEMS 1000V DC,
63 A

Similar to image

Technical data:

Number of poles		4
Design of the operating mechanism		toggle handle
Type of the driving mechanism / motor drive		No
Design of the electrical connection / for main current circuit		screw-type terminals
Product equipment / interlock		No
Continuous current / rated value	A	63
Type from device		other
Acceptability for application		
• safety cut-out switch		No
• maintenance/repair switch		No
• emergency stop switch		No
Suitability for integration / distribution board		Yes
Number of NC contacts / for auxiliary contacts		0
Number of NO contacts / for auxiliary contacts		4
Number of changeover contacts / for auxiliary contacts		0
Protection class IP		IP20
Acceptability for application		
• main switch		No

• switch disconnecter		Yes
Product extension / optional		
• motor drive		No
• voltage trigger		No
Mounting type		
• front mounting with 4-hole attachment		No
• central front mounting		No

Certificates/approvals:

General Product Approval



CCC



GOST



EG-Konf.

Declaration of Conformity

Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://eb.automation.siemens.com/mall/en/WW/Catalog/Product/5TE2515-1>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/5TE2515-1/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)


http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5TE2515-1

CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

[Datanorm GAEB81](#) [GAEB83](#) [RTF](#) [TXT](#)

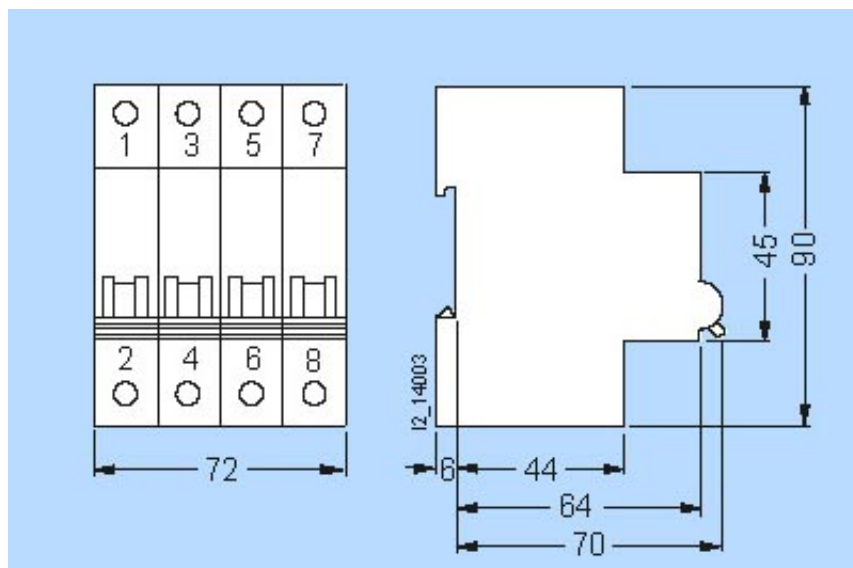

last change:

Jul 21, 2014