

TRAFFIC LIGHT 3 LAMPS 230V RED/YELLOW/GREEN



Similar to image

Technical data:		
Design type		5TE5 light indicators
Type, explanations		Light indicators for max. cable length up to 5 m
Type, explanations / additionally		with 3 lamps red, yellow and green
Nature of fluorescent material		glow lamp
type of voltage		AC
Mounting depth	mm	64
Number of pitch units for width		1
Operating voltage / rated value		
• minimum	V	230
• maximum	V	230
Active power / for filament lamp load / maximum	W	0.4
Protection class IP		IP20
Holder design / for fluorescent material		others
Color / of the lens		others
Connection terminals		
• ± screw (Pozidriv)		1
• max torque	N·m	1.2
Climatic resistance / at 95 % relative humidity acc. to DIN 50015	°C	45

Permissible ambient temperature		-5 till +40°C
Rated operational voltage Ue / AC / maximum		230V (for different voltages see 5TG8 lamps)
Rated power loss Pv / contact per pole		see 5TG8 lamps
Conductor cross sections		
- flexible, with end sleeve - rigid		1 till 6 mm ² 1.5 to 6mm ²

Certificates/approvals:

General Product Approval	Declaration of Conformity	other
--------------------------	---------------------------	-------



GOST



VDE



EG-Konf.

[Environmental Confirmations](#)

Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<http://www.siemens.com/lowvoltage/mall>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/5TE5803/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)


http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5TE5803

CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

[Datanorm](#) [GAEB81](#) [GAEB83](#) [RTF](#) [TXT](#)

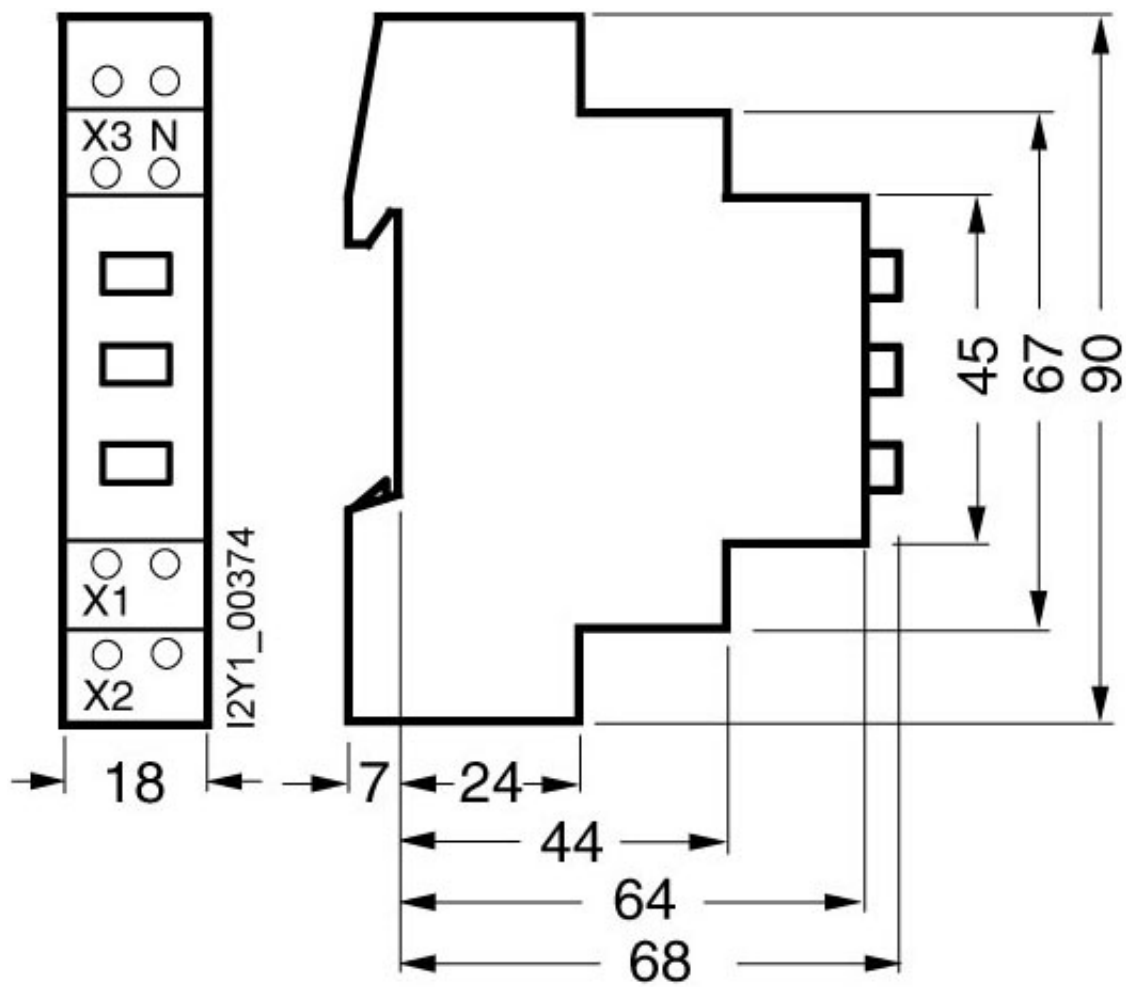

last change:

Oct 2, 2012