

ISOLATOR 32A DOUBLE POLE



Figure similar

Model		
product brandname		SENTRON
Product designation		On/Off switches
Type of light source		Not applicable
Mounting type / for light source		Not applicable
Design of the switching function		Switch disconnecter
General technical data		
Number of poles		2
Short-circuit current rating	kA	10
Type of voltage		AC
Protection class		
Protection class IP		Other
Switching capacity		
Switching capacity current / rated value	kA	0.096
Main circuit		
Operating voltage / rated value	V	440

Operating current / rated value	A	32
---------------------------------	---	----

Appearance

Color / of the lens		Not applicable
---------------------	--	----------------

Product details

Product component / Signal lamp		No
---------------------------------	--	----

Product function

Product function / positive opening (acc. to DIN VDE 0113)		No
--	--	----

Number

Number of NC contacts		0
Number of NO contacts		2
Number of CO contacts		0

Mechanical Design

Height	mm	89.8
Depth	mm	74.5
Installation depth	mm	70
Number of width units		2

General Product Approval	Declaration of Conformity
--------------------------	---------------------------



sonstig



Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://eb.automation.siemens.com/mall/en/WW/Catalog/Product/5TL1232-0>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/5TL1232-0/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)



http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5TL1232-0

CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

<http://ausschreibungstexte.siemens.com/tiplv>

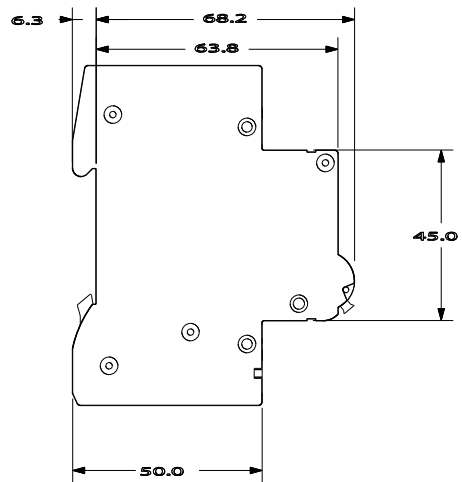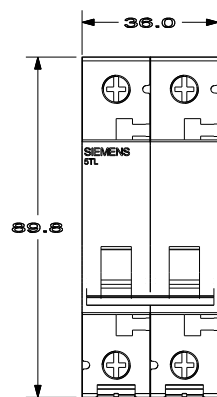

last modified:

10/17/2016