

## N-TYPE FUSE MONITOR 3AC 380 TO 415V



Similar to image

### Technical data:

|                                                                |    |                              |
|----------------------------------------------------------------|----|------------------------------|
| Installation size of fuse-link                                 |    | others                       |
| Accessories                                                    |    | others                       |
| Rated frequency                                                |    | 50 to 400 Hz                 |
| Operating tolerance                                            |    | 0.8 to 1.1                   |
| Off-delay                                                      | ms | 50                           |
| Rated operational voltage U <sub>e</sub>                       | V  | 250                          |
| Response time                                                  | ms | 50                           |
| Rated operating current AC                                     |    | -                            |
| Service life typical / electrical                              |    | 1,500,000                    |
| Connection terminals / screw                                   |    | 1                            |
| Internal resistance / the measuring paths                      | Ω  | 1,000                        |
| Rated impulse voltage strength U <sub>imp</sub> / Input/output | V  | 4,000                        |
| Climate resistance acc. to DIN EN 60068-1                      |    | 20/45/4                      |
| Permissible ambient temperature                                |    | -20 to +45                   |
| Rated control circuit voltage U <sub>c</sub> /AC in V          |    | 250                          |
| Conductor cross sections / flexible, with end sleeve           |    | min. 1 x 0.5 mm <sup>2</sup> |
| Conductor cross sections / rigid                               |    | max. 2 x 2.5 mm <sup>2</sup> |

## Certificates/approvals:

General Product  
Approval



Declaration of  
Conformity



other

[Environmental  
Confirmations](#)

## Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<http://www.siemens.com/lowvoltage/mall>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)


<http://support.automation.siemens.com/WW/view/en/5TT3170/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

[http://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=5TT3170](http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5TT3170)

CAX-Online-Generator

<http://www.siemens.com/cax>

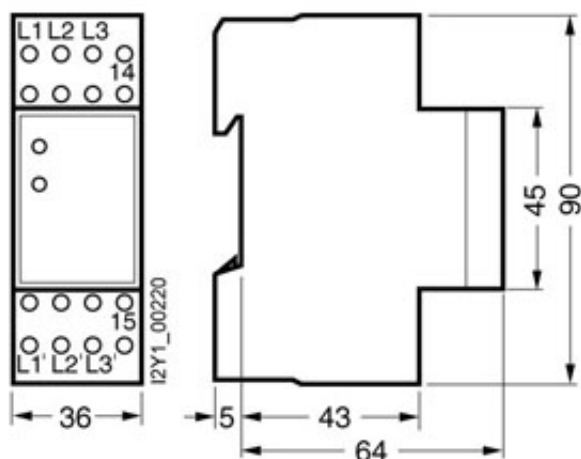

last change:

Feb 21, 2013