

TWILIGHT SWITCH AC 230V 10A SURFACE MOUNTING



| Model                                                     |    |        |
|-----------------------------------------------------------|----|--------|
| product brandname                                         |    | SETRON |
| Supply voltage                                            |    |        |
| Supply voltage frequency / rated value                    |    |        |
| • minimum                                                 | Hz | 50     |
| • maximum                                                 | Hz | 50     |
| Protection class                                          |    |        |
| Protection class IP                                       |    | IP54   |
| Protection class IP                                       |    |        |
| • of the light sensor                                     |    | other  |
| Operating resource protection class / of the light sensor |    | II     |
| Switching capacity                                        |    |        |
| Switching capacity current                                |    |        |
| • at cos phi 0.6                                          | A  | 2      |
| • Rated value                                             | A  | 10     |
| Switching capacity active power / with filament lamp load | W  | 1 200  |

|                                                  |                           |               |
|--------------------------------------------------|---------------------------|---------------|
| <b>Main circuit</b>                              |                           |               |
| Operating voltage / rated value                  | V                         | 230           |
| <b>Adjustable parameters</b>                     |                           |               |
| <b>Adjustable light sensitivity</b>              |                           |               |
| • initial value                                  | lx                        | 2             |
| • Full-scale value                               | lx                        | 2 000         |
| <b>Product function</b>                          |                           |               |
| Product function / programmable night switch-off |                           | No            |
| <b>Mechanical Design</b>                         |                           |               |
| Height                                           | mm                        | 95            |
| Depth                                            | mm                        | 75.3          |
| Installation depth                               | mm                        | 70            |
| Mounting type                                    |                           | other         |
| Mounting type / of the light sensor              |                           | wall mounting |
| Net weight                                       | g                         | 230           |
| General Product Approval                         | Declaration of Conformity | other         |



[Umweltbestätigung](#)

## Further information

**Information- and Downloadcenter (Catalogs, Brochures,...)**

<http://www.siemens.com/lowvoltage/catalogs>

**Industry Mall (Online ordering system)**

<https://eb.automation.siemens.com/mall/en/WW/Catalog/Product/5TT3303>

**Service&Support (Manuals, Certificates, Characteristics, FAQs,...)**

<http://support.automation.siemens.com/WW/view/en/5TT3303/all>

**Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)**


[http://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=5TT3303](http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5TT3303)

**CAX-Online-Generator**

<http://www.siemens.com/cax>

**Tender specifications**

<http://ausschreibungstexte.siemens.com/tiplv>

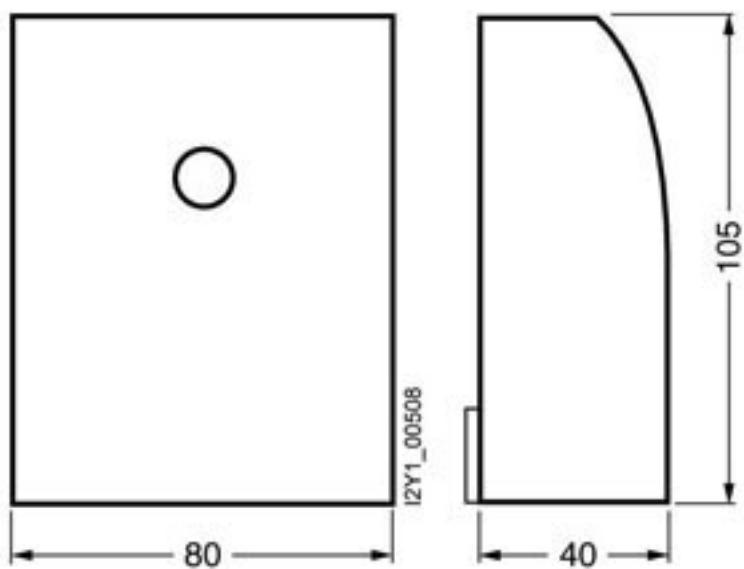

last modified:

10/17/2016