



Model		
product brand name		SETRON
Dissipation		
Power loss [W]		
• for rated value of the current / at AC / in hot operating state / per pole	W	4.6
• maximum	W	42
Main circuit		
Operating voltage / rated value		
• minimum	V	230
• maximum	V	230
Control current		
Control supply voltage		
• at AC / at 50 Hz / rated value / minimum	V	230
• at AC / at 50 Hz / rated value / maximum	V	230
• at AC / at 60 Hz / rated value / minimum	V	230
• at AC / at 60 Hz / rated value / maximum	V	230

Product function

Product function / motor overload protection		No
Height	mm	90
Depth	mm	55
Net weight	g	450

Environmental conditions

Ambient temperature

- without derating / rated value

°C

55

General Product Approval	Declaration of Conformity	other
--------------------------	---------------------------	-------



[Umweltbestätigung](#)

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://eb.automation.siemens.com/mall/en/WW/Catalog/Product/5TT3440>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/5TT3440/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)


http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5TT3440

CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

<http://ausschreibungstexte.siemens.com/tiplv>

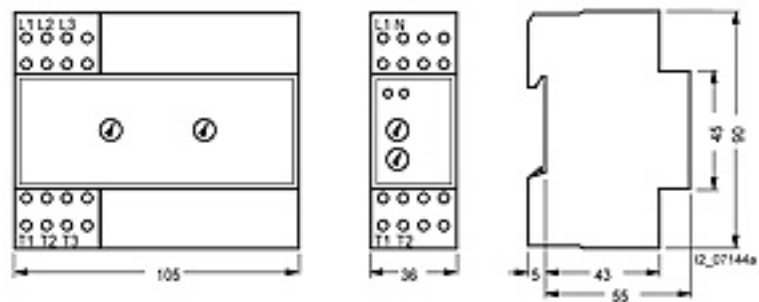

last modified:

08/11/2016