

FAULT ANNUNCIATOR, N-TYPE AC 230V
ADDITIONAL



Model		
product brandname		SETRON
General technical data		
Measurable voltage / at AC / initial value	V	230
Voltage		
Type of voltage / for actuation		AC
Type of voltage / for monitoring		AC
Measurable voltage / at AC / Full-scale value	V	230
Control current		
Control supply voltage		
• at AC / at 50 Hz / rated value / minimum	V	230
• at AC / at 50 Hz / rated value / maximum	V	230
• at AC / at 60 Hz / rated value / minimum	V	230
• at AC / at 60 Hz / rated value / maximum	V	230
Product function		
Product function		
• Voltage window recognition 1 phase		No

- Voltage window recognition 3 phase
- Voltage window recognition DC
- Overvoltage detection 1 phase
- Overvoltage detection 3 phase
- Overvoltage detection DC
- undervoltage detection 1 phase
- undervoltage detection 3 phases
- undervoltage detection DC

	No
	No
	No
	No
	No
	No
	No
	No

Connections

Type of electrical connection

- Plug-in socket

screw-type terminals
No

Mechanical Design

Height	mm	90
Width	mm	36
Depth	mm	64

Certificates

General Product Approval	Declaration of Conformity	other
--------------------------	---------------------------	-------



[Umweltbestätigung](#)

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://eb.automation.siemens.com/mall/en/WW/Catalog/Product/5TT3461>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/5TT3461/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)


http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5TT3461

CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

<http://ausschreibungstexte.siemens.com/tiplv>

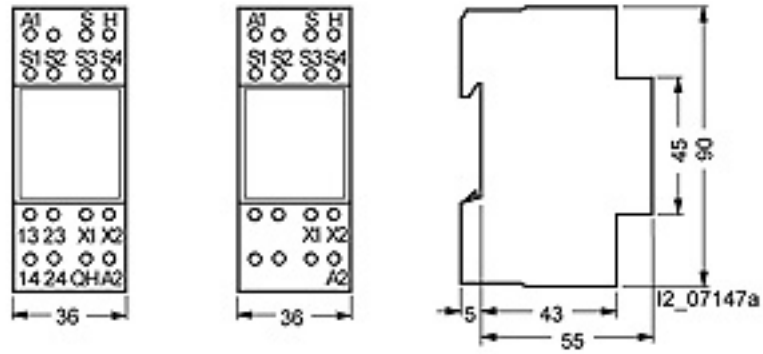

last modified:

10/17/2016