



Similar to image

ISO MONITOR INDUSTRY FOR AC NETWORKS FOR
MEAS. VOLT. UP TO 500 V AC

Technical data:		
Design of the electrical connection		screw-type terminals
Design of the acoustic signal type		for a mixed systems
Design of the electrical connection / jumper socket		No
Network leakage resistance	μF	4.5
Type of voltage / for operating		AC
Product function / defect storage		Yes
Number of NC contacts / for auxiliary contacts		0
Number of NO contacts / for auxiliary contacts		0
Number of change-over switches / for auxiliary contacts		2
Product component / isolation value indication		No
Operating voltage / rated value		
• maximum	V	500
• minimum	V	0
Adjustable response value impedance		
• 1 / initial value	kΩ	5
Operating frequency / rated value		
• minimum	Hz	10
• maximum	Hz	1,000

Adjustable response value impedance / 1 / final value	kΩ	100
Control supply voltage		
• at 60 Hz / at AC / rated value		
• minimum	V	220
• maximum	V	240
• at 50 Hz / at AC / rated value		
• minimum	V	220
• maximum	V	240
Depth	mm	64
Height	mm	90
Width	mm	36

Certificates/approvals:

General Product
Approval



GOST

Declaration of
Conformity



EG-Konf.

other

[Environmental
Confirmations](#)

Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<http://www.siemens.com/lowvoltage/mall>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/5TT3470/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)


http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5TT3470

CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

[Datanorm](#) [GAEB81](#) [GAEB83](#) [RTF](#) [TXT](#)

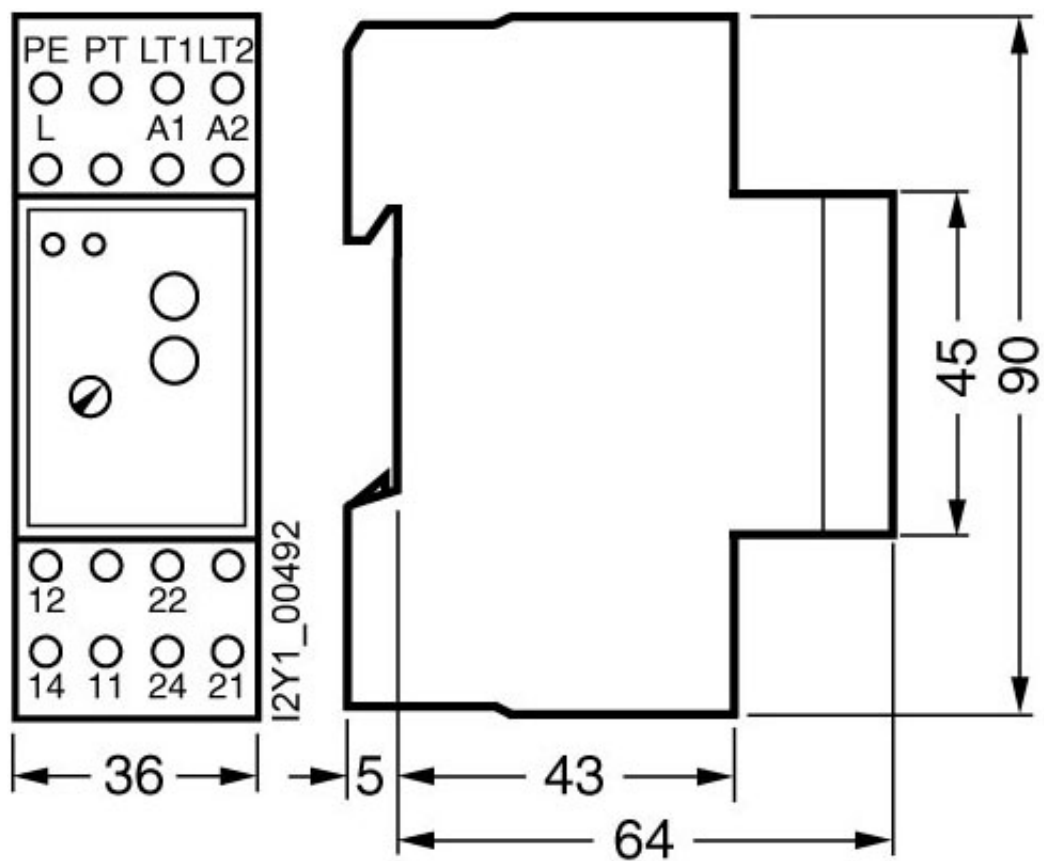

last change:

Feb 19, 2013