



ISO MONITOR INDUSTRY FOR DC NETWORKS FOR MEAS. VOLT UP TO 280 V DC

Similar to image

Technical data:		
Design of the electrical connection		screw-type terminals
Design of the acoustic signal type		For DC networks
Design of the electrical connection / jumper socket		No
Network leakage resistance	μF	4.5
Type of voltage / for operating		DC
Product function / defect storage		Yes
Number of NC contacts / for auxiliary contacts		0
Number of NO contacts / for auxiliary contacts		0
Number of change-over switches / for auxiliary contacts		2
Product component / isolation value indication		No
Operating voltage / rated value		
• maximum	V	280
• minimum	V	12
Adjustable response value impedance		
• 1 / initial value	kΩ	5
Operating frequency / rated value		
• minimum	Hz	0
• maximum	Hz	0

Adjustable response value impedance / 1 / final value	kΩ	200
Control supply voltage		
• for DC / rated value		
• minimum	V	0
• maximum	V	0
• at 60 Hz / at AC / rated value		
• minimum	V	0
• maximum	V	0
• at 50 Hz / at AC / rated value		
• minimum	V	0
• maximum	V	0
Depth	mm	64
Height	mm	90
Width	mm	36

Certificates/approvals:

General Product
Approval



Declaration of
Conformity



other

[Environmental
Confirmations](#)

Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<http://www.siemens.com/lowvoltage/mall>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)


<http://support.automation.siemens.com/WW/view/en/5TT3471/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5TT3471

CAX-Online-Generator

<http://www.siemens.com/cax>

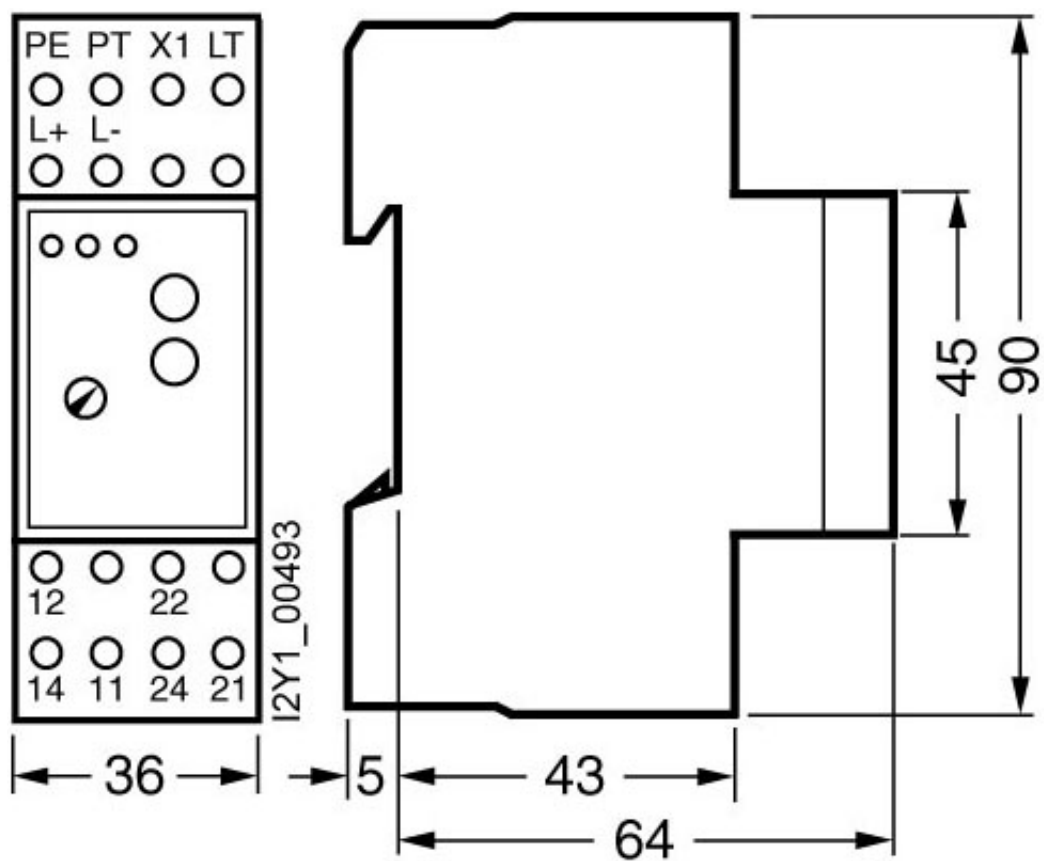

last change:

Feb 19, 2013