



RELAY,N-TYPE W 2 CHANGE OV.CONT. CONTACT FOR
AC 230V 16A CONTROL AC 230V

Similar to image

Technical data:		
Mounting depth	mm	90
Number of NC contacts		0
Type of mounting		DIN rail
Number of change-over switches		2
Number of NO contacts		0
Number of pitch units for width		1
Type of voltage		
• of control voltage_1		AC
Switching capacity apparent power		
• for uncorrected fluorescent lamp load	V·A	400
Switching capacity real power / for filament lamp load	W	1,200
Switching capacity current / at cos phi 0.6	A	16
Operating current / rated value	A	16
Control voltage frequency		
• _1		
• initial value	Hz	50
• final value	Hz	50
Control voltage/ _1		

• final value		
• initial value	V	230
•	V	230
Type of voltage / of supply voltage		AC
Relay design		partially electronic
Supply voltage / maximum	V	400
Supply voltage / minimum	V	400

Certificates/approvals:

General Product Approval	Declaration of Conformity	other
 CCC	 EG-Konf.	Environmental Confirmations
 GOST	 VDE	

Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<http://www.siemens.com/lowvoltage/mall>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/5TT4207-0/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)


http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5TT4207-0

CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

[Datanorm](#) [GAEB81](#) [GAEB83](#) [RTF](#) [TXT](#)

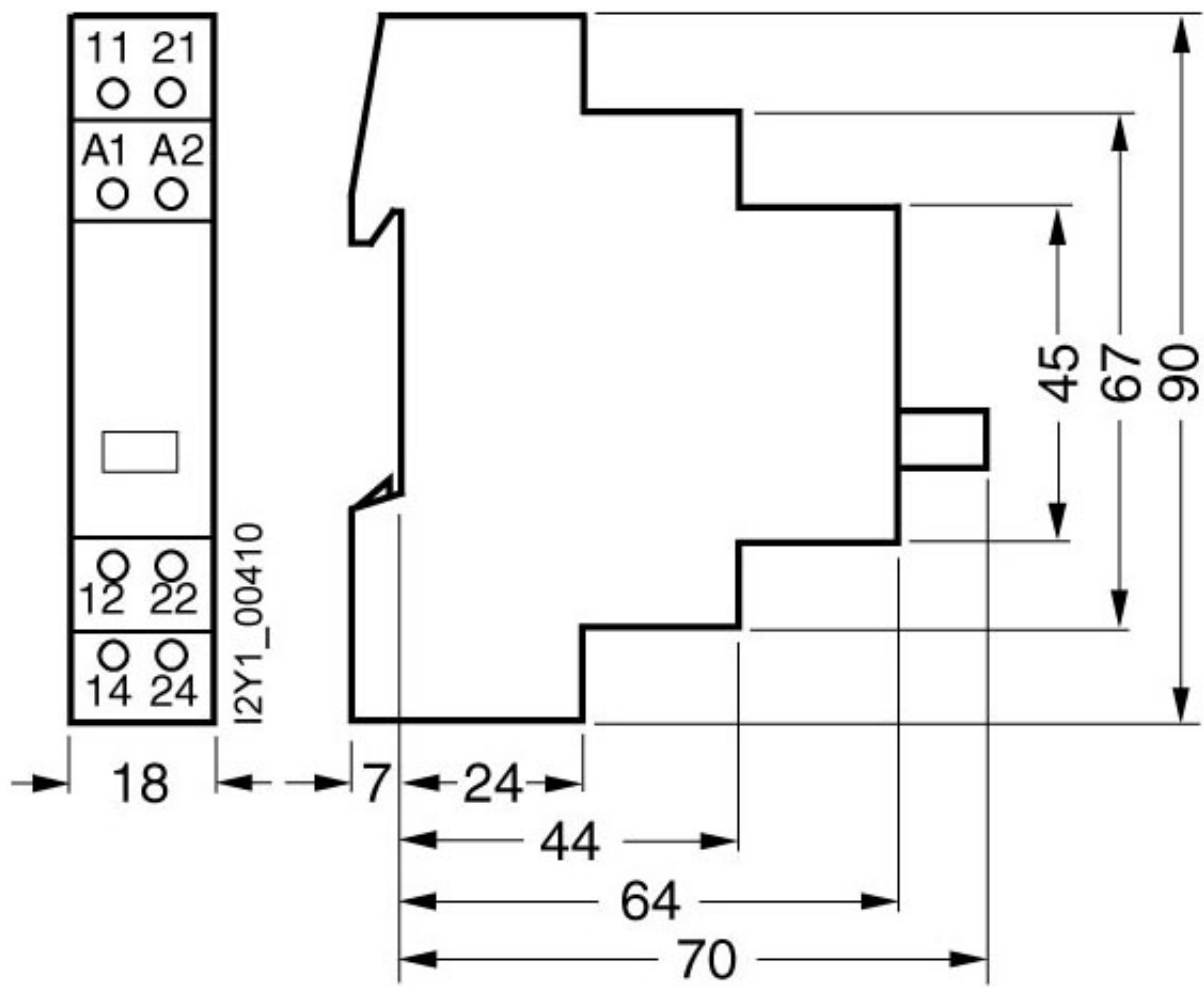

last change:

Dec 14, 2012