


COMPENSATOR FOR REMOTE SWITCH 5TT41..
FOR GLOW LAMP CURRENT 20MA



Model		
product brand name		SETRON
Latching relay design		others
Voltage		
Continuous voltage fuse version		Yes
Supply voltage		
• minimum	V	250
• maximum	V	250
Protection class		
Protection class IP		IP20, with connected conductors
Switching capacity		
Switching capacity current		
• at cos phi 0.6	A	16
Control current		
Control voltage frequency		
• _1 / initial value	Hz	50
• _1 / Full-scale value	Hz	50

Number		
Number of terminals		2
Connections		
Connectable conductor cross-section		
- for flexible conductor / with core end processing — minimum — maximum - for rigid conductor — minimum — maximum	mm ² mm ² mm ² mm ²	1 6 1.5 6
Mechanical Design		
Mounting height	mm	90
Mounting position		any
Installation depth	mm	70
Number of width units		1
Mounting type		DIN rail
Net weight	g	73
Environmental conditions		
Ambient temperature		
- minimum - maximum	°C °C	-10 40
Certificates		
General Product Approval		
		sonstig
Further information		
Information- and Downloadcenter (Catalogs, Brochures,...) http://www.siemens.com/lowvoltage/catalogs		
Industry Mall (Online ordering system) https://eb.automation.siemens.com/mall/en/WW/Catalog/Product/5TT4920		
Service&Support (Manuals, Certificates, Characteristics, FAQs,...) http://support.automation.siemens.com/WW/view/en/5TT4920/all		
Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...) http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5TT4920		
CAX-Online-Generator http://www.siemens.com/cax		
Tender specifications http://ausschreibungstexte.siemens.com/tiplv		

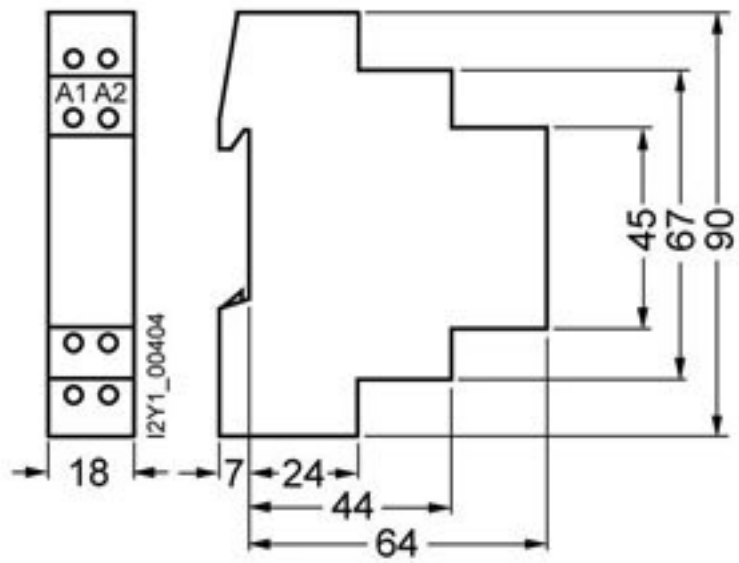

last modified:

08/11/2016