



PRIORITY SWITCH,
N-TYPE AC 230V 6-40A MAX. 27 KW

Similar to image

Technical data:		
Design of the electrical connection		screw-type terminals
Product function / current window recognition DC		No
Product function		
• overcurrent recognition of 1 phase		No
• undercurrent recognition of 3 phases		No
• undercurrent recognition of 1 phase		Yes
• overcurrent recognition DC		No
• undercurrent recognition DC		No
• overcurrent recognition of 3 phases		No
• tension window recognition of 1 phase		No
• tension window recognition of 3 phases		No
Design of the electrical connection / jumper socket		No
Type of voltage / for operating		AC
Number of NC contacts / for auxiliary contacts		1
Number of NO contacts / for auxiliary contacts		0
Number of change-over switches / for auxiliary contacts		0
Measurable current / for AC / final value	A	6
Measurable current / for AC / initial value	A	6

Control supply voltage		
	• at 50 Hz / at AC / rated value	
	• minimum	V 230
	• maximum	V 230
	• at 60 Hz / at AC / rated value	
	• minimum	V 230
	• maximum	V 230
Depth	mm	55
Height	mm	86
Width	mm	18

Certificates/approvals:

General Product Approval	Declaration of Conformity	other
 GOST	 EG-Konf.	Environmental Confirmations

Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<http://www.siemens.com/lowvoltage/mall>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)


<http://support.automation.siemens.com/WW/view/en/5TT6103/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5TT6103

CAX-Online-Generator

<http://www.siemens.com/cax>

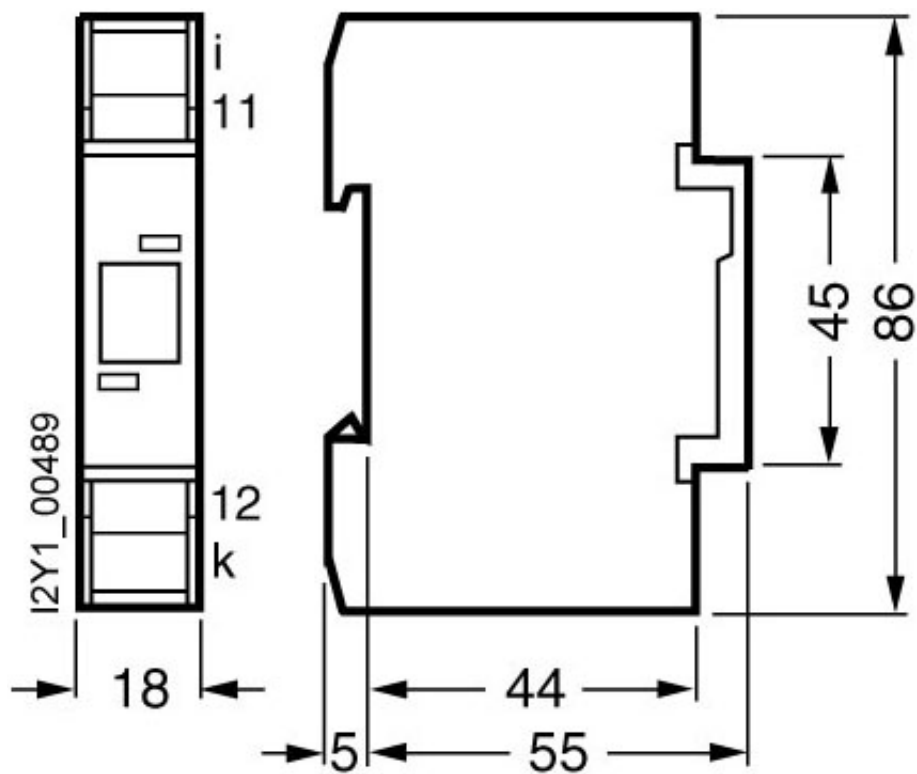

last change:

Feb 18, 2013