SIEMENS

Product data sheet 5TT6111

Similar to image

CURRENT RELAY,N-TYPE AC 230V 10A 1PHASE, BELOW

Technical data:		
Design of the electrical connection		screw-type terminals
Product function / current window recognition DC		No
Product function		
• overcurrent recognition of 1 phase		No
• undercurrent recognition of 3 phases		No
• undercurrent recognition of 1 phase		Yes
• overcurrent recognition DC		No
• undercurrent recognition DC		No
• overcurrent recognition of 3 phases		No
• tension window recognition of 1 phase		No
• tension window recognition of 3 phases		No
Adjustable operating delay time		
• final value	s	20
• initial value	s	0.1
Adjustable backslide delay time		
• initial value	s	0.1
• final value	s	20
Design of the electrical connection / jumper socket		No

Type of voltage / for operating		AC
Number of NC contacts / for auxiliary contacts		0
Number of NO contacts / for auxiliary contacts		0
Number of change-over switches / for auxiliary contacts		1
Measurable current / for AC / final value	A	10
Measurable current / for AC / initial value	A	10
Control supply voltage		
• at 50 Hz / at AC / rated value		
• minimum	V	230
• maximum	V	230
• at 60 Hz / at AC / rated value		
• minimum	V	230
• maximum	V	230
Depth	mm	64
Height	mm	90
Width	mm	18

Certificates/approvals:

General Product Approval	Declaration of Conformity	other
GOST	EG-Konf.	Environmental Confirmations

Further information:

Information- and Downloadcenter (Catalogs, Brochures,…)
http://www.siemens.com/lowvoltage/catalogs

Industry Mall (Online ordering system)
http://www.siemens.com/lowvoltage/mall

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)
http://support.automation.siemens.com/WW/view/en/5TT6111/all

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)
http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5TT6111

CAx-Online-Generator
http://www.siemens.com/cax

Tender specifications
Datanorm GAEB81 GAEB83 RTF TXT

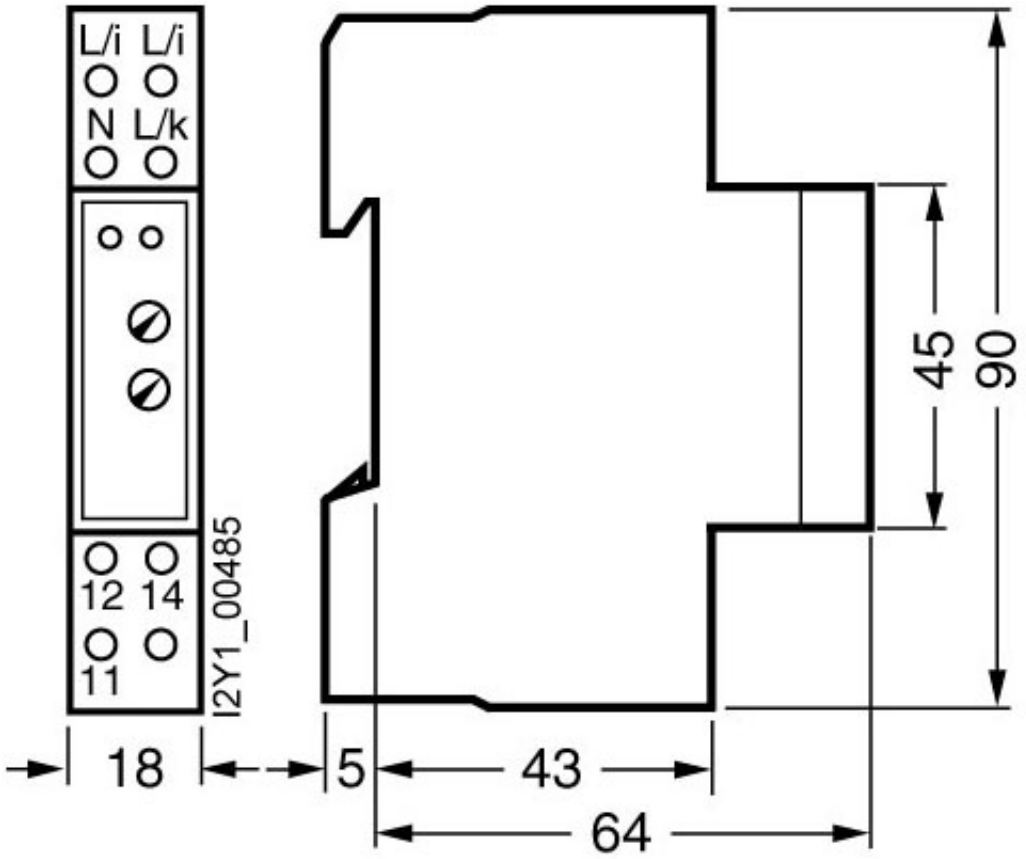

last change: Feb 18, 2013