

SPARE PART SIPLUS S7-400 MODULE UR2-H ALU 2X9
SLOT FOR MEDIAL STRESS BASED ON 6ES7400-2JA10-0AA0

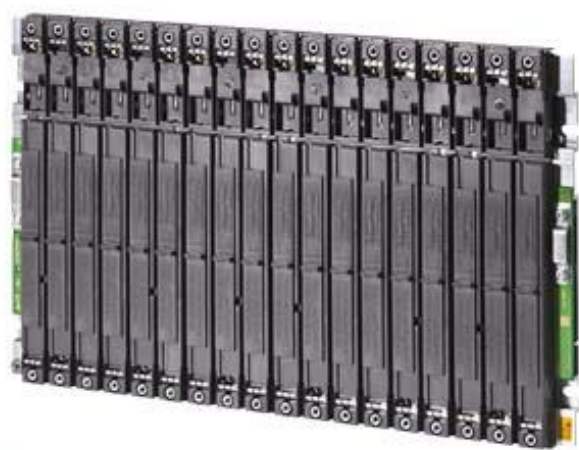


Figure similar

Hardware configuration	
Rack	
• Communication bus	Yes
• P bus	Yes
Slots	
• Number of single-width slots, max.	18
Ambient conditions	
Ambient temperature during operation	
• min.	0 °C; = Tmin
• max.	60 °C; = Tmax
Extended ambient conditions	
• relative to ambient temperature-atmospheric pressure-installation altitude	Tmin ... Tmax at 1080 hPa ... 795 hPa (-1000 m ... +2000 m) // Tmin ... (Tmax - 10K) at 795 hPa ... 658 hPa (+2000 m ... +3500 m) // Tmin ... (Tmax - 20K) at 658 hPa ... 540 hPa (+3500 m ... +5000 m)
Relative humidity	

— With condensation, tested in accordance with IEC 60068-2-38, max.

100 %; Relative humidity, incl. condensation / frost permitted (no commissioning under condensation conditions)

Resistance

— against biologically active substances / conformity with EN 60721-3-3

Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna). The supplied connector covers must remain on the unused interfaces during operation!

— against chemically active substances / conformity with EN 60721-3-3

Yes; Class 3C4 incl. salt spray according to EN 60068-2-52 (degree of severity 3). The supplied connector covers must remain on the unused interfaces during operation!

— against mechanically active substances / conformity with EN 60721-3-3

Yes; Class 3S4 incl. sand, dust. The supplied connector covers must remain on the unused interfaces during operation!

Dimensions

Width

482.5 mm

Height

290 mm

Depth

27.5 mm

Weights

Weight, approx.

3 000 g

last modified:

10/25/2016