


SERVICE PACKAGE FOR PP7, PP17 I, PP17 II, 1 X PP7 GASKET ,
1 X PP17 GASKET, 5 X CLAMPS, 1 X 24V DC 2 PIN CONNECTOR,
1 X 24V DC 3 PIN CONNECTOR, 1 X 4 PIN CONNECTOR, 2 X 16
PIN CONNECTOR

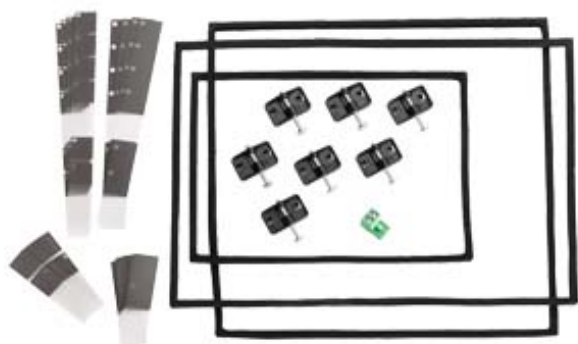

General information

Product type designation Service set Push Button Panel

Standards, approvals, certificates

CE mark Yes

Ambient conditions

Ambient temperature during operation

- min. 0 °C
- max. 55 °C

Ambient temperature during storage/transportation

- min. -20 °C
- max. 70 °C

Relative humidity

- Operation, max. 95 %

Scope of supply

Delivery quantity in pieces

- Parts per unit

1; Content: 1 x mounting seal PP7, 1 x mounting seal PP17, 5 x plastic mounting clip, 1 x 2-pin female connector, 1 x 3-pin female connector, 1 x 4-pin female connector, 2 x 16-pin female connector

Other

Note: for PP7, PP17-I, PP17-II

Usable in the following products

- Product 1 [6AV3688-3AA03-0AX0](#)
- Product 2 [6AG1688-3CD13-4AX0](#)
- Product 3 [6AG1688-3ED13-4AX0](#)

last modified: 10/15/2016