


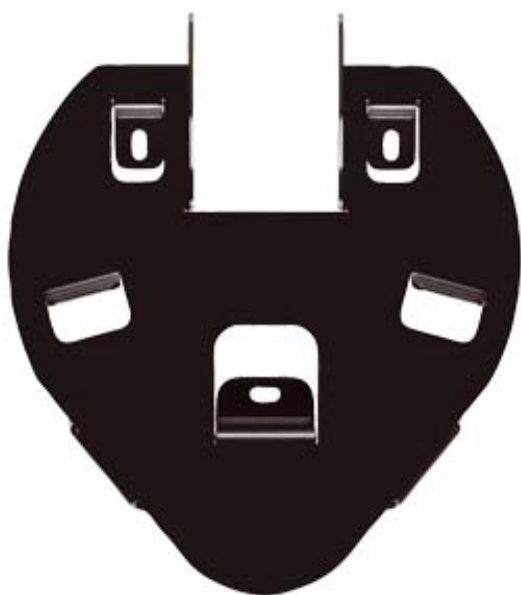

WALL BRACKET FOR MOBILE PANEL 170,
MOBILE PANEL 177, MOBILE PANEL 277,
MOBILE PANEL 277 IWLAN,
MOBILE PANEL 277F IWLAN,
WITHOUT MOUNTING PARTS

Installation type/mounting	
Mounting in portrait format possible	Yes
Mounting in landscape format possible	No
Standards, approvals, certificates	
CE mark	Yes
Ambient conditions	
Operating temperature	
Operating temperature range, min.	0 °C
Operating temperature range, max.	55 °C
Storage/transport temperature	
Min.	-20 °C
max.	70 °C
Relative humidity	
max. relative humidity	90 %
Mechanics/material	
Type of housing (front)	
Sheet steel	Yes ; Powder-coated
Dimensions	

Width	200 mm
Height	230 mm
Depth	25 mm ; Constructive
Weights	
Weight without packaging	550 g ; 880 g incl. cable holder
Scope of supply	
Delivery unit in items	1 ; Color: Black
other	
Note:	Mobile Panel 170, Mobile Panel 177, Mobile Panel 277 IWLAN, Mobile Panel 277F IWLAN, without mounting parts
Usable in the following products	
Product 1	6AV6545-4BA16-0CX0
Product 2	6AV6545-4BB16-0CX0
Product 3	6AV6545-4BC16-0CX0
Product 4	6AV6645-0AA01-0AX0
Product 5	6AV6645-0AB01-0AX0
Product 6	6AV6645-0AC01-0AX0
Product 7	6AV6645-0BA01-0AX0
Product 8	6AV6645-0BB01-0AX0
Product 9	6AV6645-0BC01-0AX0
Product 10	6AV6645-0DD01-0AX0
Product 11	6AV6645-0CB01-0AX0
Product 12	6AV6645-0DB01-0AX0
Product 13	6AV6645-0DC01-0AX0
Status	Jun 25, 2014