


SIMATIC ITC1200, INDUSTRIAL THIN CLIENT, 12" WIDESCREEN-TFT-DISPLAY, TOUCH OPERATION, SUPPORTED PROTOCOLS: RDP, VNC, SMARTSERVER, WEB

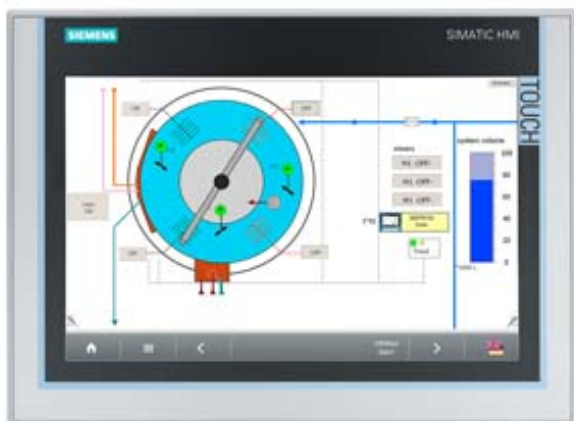

Display	
Design of display	TFT widescreen display, LED backlighting
Screen diagonal	12.1 in
Display width	261.1 mm
Display height	163.2 mm
Number of colors	16 777 216
Resolution (pixels)	
• Horizontal image resolution	1 280 Pixel
• Vertical image resolution	800 Pixel
Backlighting	
• Type of backlighting	LED, dimmable
• Backlight dimmable	Yes; 5-100 %
Control elements	
Touch operation	
• Design as touch screen	Yes
• Monitor keyboard	Yes
Installation type/mounting	
Built-in unit	Yes

Supply voltage	
Type of supply voltage	24 V DC
permissible range, lower limit (DC)	19.2 V
permissible range, upper limit (DC)	28.8 V
Input current	
Current consumption, max.	1.2 A
Starting current inrush I _p t	0.5 A ² ·s
Interfaces	
Number of industrial Ethernet interfaces	1
USB on the rear	2
USB at the front	0
Connection for keyboard/mouse	USB
Industrial Ethernet	
• Transmission rate, max.	1 000 Mbit/s
Protocols	
Protocols (Ethernet)	
• TCP/IP	Yes
• DHCP	Yes
• SNMP	Yes
• DCP	Yes
• LLDP	Yes
WEB characteristics	
• HTTP	Yes
• HTML	Yes; HTML5
• XML	Yes
• CSS	Yes
• JavaScript	Yes
Protocols (terminal link)	
• Sm@rtServer	Yes
• RDP	Yes
• VNC viewer	Yes
• Citrix	No
• SINUMERIK	Yes
Protocols	
PROFINET IO Device	
Services	
— PROFINergy	No
Degree and class of protection	
IP65 at front	Yes
IP20 rear	Yes

Standards, approvals, certificates	
CE mark	Yes
cULus	Yes
RCM (formerly C-TICK)	Yes
KC approval	Yes
Use in hazardous areas	
• cULus Class I Zone 1	No
• cULus Class I Zone 2, Division 2	Yes; Available soon
• FM Class I Division 2	Yes; Available soon
Ambient conditions	
Ambient temperature during operation	
• min.	0 °C
• max.	50 °C
Ambient temperature during storage/transportation	
• min.	-20 °C
• max.	60 °C
Relative humidity	
• Operation, max.	90 %
Software	
Web browser	Yes
PDF reader	Yes
Configuration	
Configuration	
• On-board	Yes
• Remote administration	Yes; With Remote Configuration Center (RCC) as of V2.0
Languages	
Online languages	
• German	Yes
• English	Yes
Peripherals/Options	
Peripherals	
• USB memory	Yes; USB storage medium can be connected
Mechanics/material	
Enclosure material (front)	
• Aluminum	Yes
Dimensions	
Width of the housing front	330 mm
Height of housing front	241 mm
Mounting cutout, width	310 mm

Mounting cutout, height	221 mm
Overall depth	82 mm
Weights	
Weight without packaging	3.4 kg
Weight incl. packaging	4.1 kg
last modified:	08/16/2016