


SIEMENS

Product data sheet

6AV6671-3AH00-0AX0

INDUSTRIAL USB HUB 4 IP65 WITH 4 USB
INTERFACES,
USABLE WITH PANEL PC AND MP

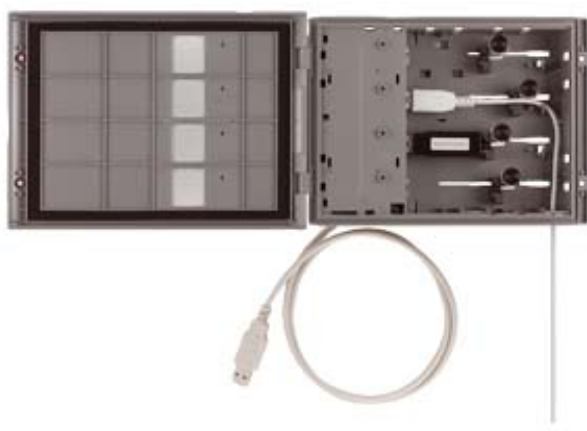

Installation type/mounting	
Mounting rail installation possible	Yes ; Standard - DIN rail
Mounting in landscape format possible	Yes
Supply voltage	
Type of supply voltage	24 V DC
Rated voltage/DC	24 V
permissible range, lower limit (DC)	20.4 V
permissible range, upper limit (DC)	28.8 V
Interfaces	
Number of USB interfaces	4 ; 500 mA each, e.g. mouse, keyboard, printer, USB stick
Degree and class of protection	
Type of protection	20
IP (at the front)	65
Standards, approvals, certificates	
CE	Yes

Ambient conditions	
Operating temperature	
Operation (vertical installation)	0 °C to +50 °C
in vertical mounting position/ minimum	0 °C
in vertical mounting position/ maximum	50 °C
Storage/transport temperature	
Min.	-20 °C
max.	60 °C
Relative humidity	
max. relative humidity	90 %
Mechanics/material	
Type of housing (front)	
Plastic	Yes
Dimensions	
Width of the housing front	212 mm
Height of housing front	156 mm
Depth/installation dimension	50 mm
Weight	
Weight without packaging	460 g
Scope of supply	
Delivery unit in items	1
other	
Note:	Degree of protection at front only with front door closed
Status	Jul 17, 2012