


SERVICE SET FOR MP 277 8" TOUCH, MP 277 8" KEY PROD.
VERSION "PV15" AND HIGHER MP 277 10" TOUCH PROD.
VERSION "PV15" AND HIGHER AMOUNT AND CONTENT: SEE
TECHNICAL DATA

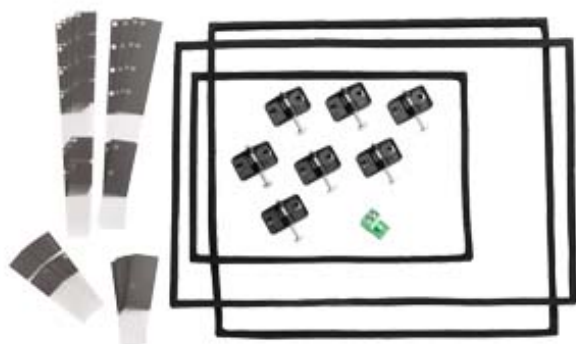

General information

Product type designation Service set 8" to 10" devices

Standards, approvals, certificates

CE mark Yes

Ambient conditions

Ambient temperature during operation

- min. 0 °C
- max. 55 °C

Ambient temperature during storage/transportation

- min. -20 °C
- max. 70 °C

Relative humidity

- Operation, max. 95 %

Scope of supply

Delivery quantity in pieces

- Parts per unit 1; Content: 14x spring mounting clip, 1x 2-pin female connector

Other

Target devices	for MP 277 8" touch, MP 277 8" key product version "ES 15" and later, MP 277 10" touch product version "ES 15" and later
Usable in the following products	
• Product 1	6AV6643-0CB01-1AX0
• Product 2	6AV6643-0CB01-1AX1
• Product 3	6AV6643-0DB01-1AX5
• Product 4	6AV6643-0DB01-1AX1
• Product 5	6AV6643-0CD01-1AX5
• Product 6	6AV6643-7CD00-0CJ0
• Product 7	6AV6643-7CD00-0CJ1
• Product 8	6AV6643-0CD01-1AX1
last modified:	10/21/2016