


SERVICE SET FOR MP 277 10" TOUCH WITH STAINLESS STEEL
FRONT AMOUNT AND CONTENT: SEE TECHNICAL DATA

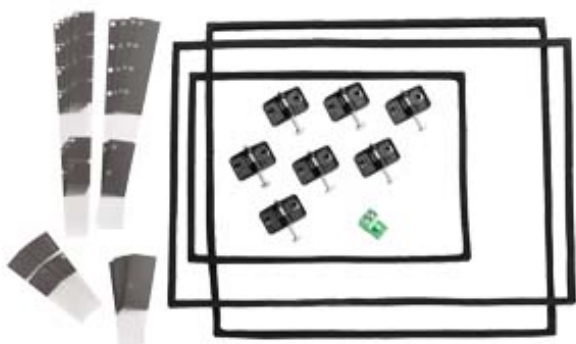

General information

Product type designation Service set 10" devices, Type 2

Standards, approvals, certificates

CE mark Yes

Ambient conditions

Ambient temperature during operation

- min. 0 °C
- max. 55 °C

Ambient temperature during storage/transportation

- min. -20 °C
- max. 70 °C

Relative humidity

- Operation, max. 95 %

Scope of supply

Delivery quantity in pieces

- Parts per unit 1; Content: 1x installation seal, 10x cast aluminum mounting clips, 1x 2-pin female connector, 1x Allen key

Other	
Target devices	for MP277 10" Touch with stainless steel front
Usable in the following products	
• Product 1	6AV6643-8AD10-0AA0
• Product 2	6AV6643-8AD10-0AA1
• Product 3	6AV6643-0ED01-2AX0
last modified:	10/21/2016