


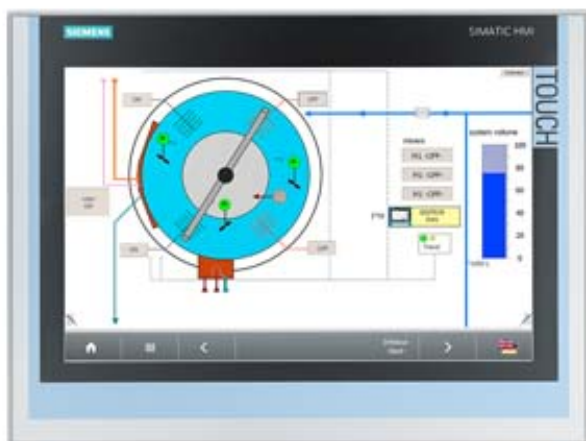

SIMATIC IFP1500 FLAT PANEL 15" DISPLAY (16:10),
W/O TOUCH,
DISPLAY ONLY EXTENDED VERSION MAX. 30M,
1280X800 PIXEL,
FOR 24V DC AND 100-240V AC,
DISPLAYPORT / DVI INTERFACE INCL. DVI/USB-CABLE
1,8 M

General information

Short designation

Flat Panel 15" display ext.

Display

Screen diagonal

15.4 in

Screen diagonal (cm)

40 cm

Display width

331.2 mm

Display height

207 mm

Viewing angle

170° x 170°

Type

TFT widescreen display, LED backlighting

On Screen Display (OSD) configuration

No, can be set with the software

Number of colors (bit levels)

24 bit

Number of colors

16777216

Resolution (pixels)

horizontal image resolution

1280

vertical image resolution

800

Resolution (WxH in pixel)

1280 x 800

Pixel size, horizontal

0.259 mm

Pixel size, vertical

0.259 mm

General features

non-reflective and tempered mineral glass screen	Yes
Detachable from computer unit	30 m
Brightness/contrast	400 cd/m ² / 1000:1
Brightness, max.	400 cd/m ²
Backlighting	
Backlighting (type)	LED
MTBF backlighting (up to 50%, at 25 °C)	50000 h ; At 25°C
Backlight dimmable	Yes ; 0-100 %
Control elements	
Function keys	No
Mouse/cursor control	
external mouse	USB
Keyboard fonts	
Alphanumeric and numeric block	Yes
Installation type/mounting	
Built-in unit	Yes ; Portrait mode possible
permissible angle to the vertical backward (console)	35 °
permissible angle to the vertical forward (ceiling mounting)	35 °
Supply voltage	
Type of supply voltage	DC
AC	Yes
DC	Yes
Rated value (DC)	24 V
permissible range, lower limit (DC)	19.2 V
permissible range, upper limit (DC)	28.8 V
Rated value (AC)	100 V ; Up to 240V 50/60Hz
permissible range, lower limit (AC)	90 V
permissible range, upper limit (AC)	264 V
Power loss	
Power loss AC	
typical	40 W
Maximum	60 W
Power loss DC	
typical	40 W
Maximum	65 W
Interfaces	
USB on the rear	2
Video interfaces	

DVI-D	Yes
Display port	Yes ; Display port V1.1
Touch interfaces	
USB	No
Degree and class of protection	
IP65 at front	Yes
Enclosure Type 4 at the front	Yes
NEMA4 at the front	No
NEMA4X at the front	No
IP20 rear	Yes
Standards, approvals, certificates	
CE mark	Yes
KC approval	Yes
cULus	Yes ; Corresponds to UL 508
RCM (former C-TICK)	Yes
Use in hazardous areas	
FM Class I Division 2	No
Ambient conditions	
Min. ambient temperature	0 °C
Max. ambient temperature	50 °C ; Vertical installation (horizontal)
Storage/transport temperature	
min.	-20 °C
max.	60 °C
Relative humidity	
Relative humidity during operation	95 % ; Non-condensing
Vibrations	
Vibration load in operation	1 g
Vibration load during transport/storage	1 g
Shock testing	
Shock load during operation	15 g
Shock load during transport/storage	15 g
Connection method	
Connector (IEC) for cold condititons	Yes
Mechanics/material	
Type of housing (front)	aluminum
Aluminum	Yes
Dimensions	
Width of the housing front	415 mm

Height of housing front	310 mm
Mounting cutout/device depth (W x H x D)	
Mounting cutout, width	396 mm ; Tolerance: +1 mm
Mounting cutout, height	291 mm ; Tolerance: +1 mm
Overall depth	62.5 mm
Weights	
Weight without packaging	3.9 kg
Weight incl. packaging	5 kg
Status	Jul 21, 2014