


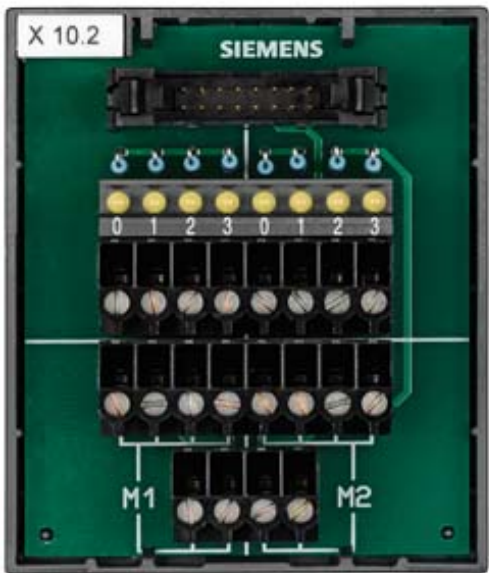

TERMINAL BLOCK TP2I W. LED SCREW TERM  
TERMINAL BLOCK TP2 8 CHANNELS F. 2A-DIGITAL OUTPUT  
AND 2X5 MULTIPLICATION TERMINALS SORT: SCREW  
TERMINAL WITH LED, PACK. UNIT=1 PCS 16 POLE IDC  
CONNECT. FOR CABLE

| Operating data                                         |                 |
|--------------------------------------------------------|-----------------|
| Operating voltage                                      |                 |
| • rated value                                          | 60 V            |
| Current / rated value                                  | 1 A             |
| Operating temperature                                  | 0 ... 60 °C     |
| Number of terminal levels                              | 1               |
| Number of terminal points / per terminal level         | 1               |
| Design of terminal / Terminal levels internally linked | No              |
| Product component                                      |                 |
| • PE connection                                        | No              |
| • Shield connection                                    | No              |
| • Disconnector                                         | No              |
| • required / connection plate                          | No              |
| Product feature / Infeed function                      | Yes             |
| Product feature / cross-connectable                    | No              |
| Connectable conductor cross-section                    |                 |
| • stranded                                             | 0.5 ... 2.5 mm² |
| • finely stranded / without core end processing        | 0.5 ... 2.5 mm² |
| • finely stranded / with core end processing           | 0.5 ... 2.5 mm² |

| General data                                     |         |
|--------------------------------------------------|---------|
| Design tested acc. to type of protection / EEx e | No      |
| Equipment marking / acc. to DIN EN 81346-2       | X       |
| Color                                            |         |
| • of the enclosure                               | black   |
| Length                                           | 80 mm   |
| Width / of the enclosure                         | 68 mm   |
| Height / with lowest-profile installation        | 43.2 mm |