

TERMINAL BLOCK TPKI W/O LED SCREW TERM.
TERMINAL BLOCK TPK 2X8 CHANNELS AND 2X2X2 TERMINALS
FOR POTENTIAL SUPPLY SORT: SCREW TERMINAL WITHOUT
LED, PACK. UNIT=1 PCS 2X16 POLE IDC CONNECT. FOR CABLE

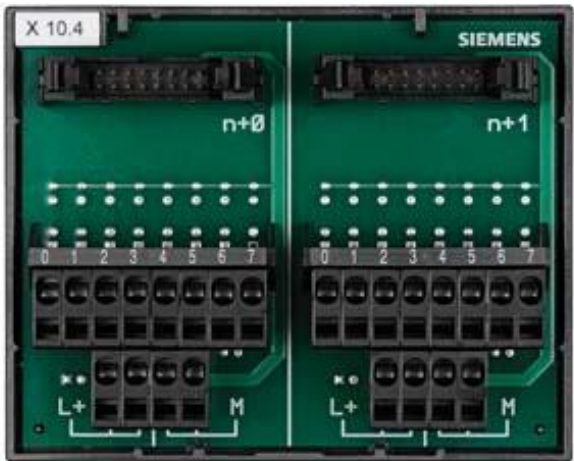


Figure similar

Operating data	
Operating voltage	
• rated value	60 V
Current / rated value	1 A
Operating temperature	0 ... 60 °C
Number of terminal levels	1
Number of terminal points / per terminal level	1
Design of terminal / Terminal levels internally linked	No
Product component	
• PE connection	No
• Shield connection	No
• Disconnecter	No
• required / connection plate	No
Product feature / Infeed function	Yes
Product feature / cross-connectable	No
Connectable conductor cross-section	
• stranded	0.5 ... 2.5 mm²

- finely stranded / without core end processing
- finely stranded / with core end processing

0.5 ... 2.5 mm²

0.5 ... 2.5 mm²

General data

Design tested acc. to type of protection / EEx e	No
Equipment marking / acc. to DIN EN 81346-2	X
Color	
• of the enclosure	black
Length	80 mm
Width / of the enclosure	100 mm
Height / with lowest-profile installation	43.2 mm