

Data sheet

6GT2090-0QA00-0AX3


Product type designation

Product description

Special support MDS 439E/U 589 long version

Support for mounting heat-resistant transponders between two crossbars

MOBY I / U / RF300 SPECIAL SUPPORT FOR HEAT-RESISTANT DATA STORAGE MDS 439E / MDS U589 / RF380T LONG VERSION 275 X 140 WITHOUT COVERING HOOD

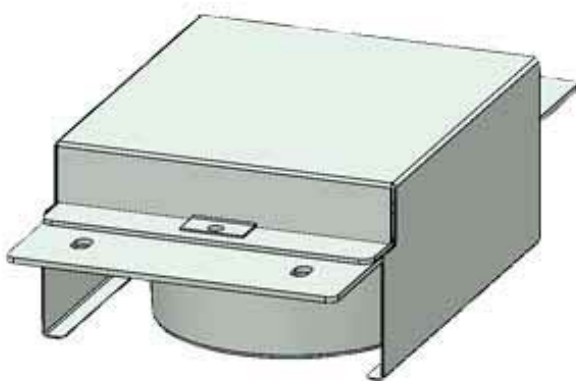

Suitability for use

Transponders with a diameter of 114 mm can be mounted in the support

Mechanical data

Material

V2A sheet

Color

silver

Permitted ambient conditions

Ambient temperature

- during operation -40 ... +220 °C
- during storage -40 ... +220 °C
- during transport -40 ... +220 °C

Design, dimensions and weight

Width

140 mm

Height

2.5 mm

Depth

275 mm

Further Information / Internet Links

Internet-Link

- to website: TIA Selection Tool
- to website: Selector SIMATIC NET SELECTION TOOL
- to the website: IWLAN
- to website: Industrial communication
- to website: Industry Mall
- to website: Information and Download Center
- to website: Image database
- to website: CAx Download Manager
- to website: Industry Online Support

<http://www.siemens.com/tia-selection-tool>

<https://support.industry.siemens.com/WW/view/en/67384964>

<http://www.siemens.com/iwlan>

<http://www.siemens.com/ident/rfid>

<https://mall.industry.siemens.com>

<http://www.siemens.com/industry/infocenter>

<http://automation.siemens.com/bilddb>

<http://www.siemens.com/cax>

<https://support.industry.siemens.com>

last modified:

10/19/2016