

SINAMICS/MICROMASTER PX LINE REACTOR INPUT: 3AC 380-480 V, 50/60 HZ 331 A

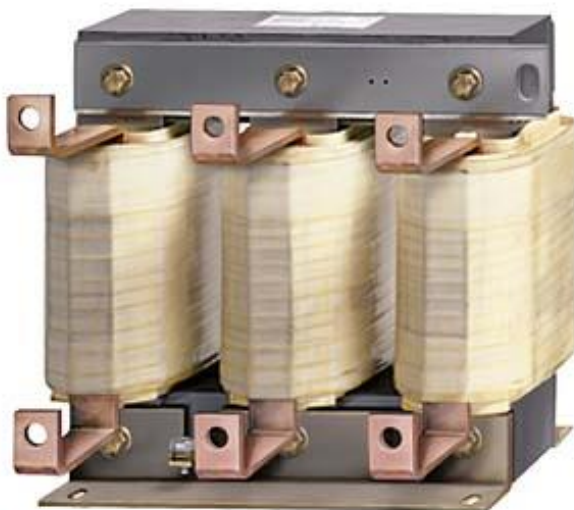


Figure similar

Order number	
Phase number / of the input voltage	3
Type of voltage / of the input voltage	AC
Input voltage	380 ... 480
Output current / rated value	331 A
Power loss [W]	
• at 50 Hz	Wert fehlt!
• at 60 Hz	Wert fehlt!
Type of electrical connection	
• for mains supply line	Flange connection for cable lug M10
• for load-side outgoing feeder	Flange connection for cable lug M10
Type of connectable conductor cross-section / for load-side outgoing feeder	Wert fehlt!
Connectable conductor cross-section	
• for mains supply line	Wert fehlt!
Type of electrical connection / for PE conductor	M8 Screw
Protection class IP	IP00
Width	270 mm

Height	248 mm
Depth	200 mm
Net weight	27.8 kg
Certificate of suitability	cURus

Further information

Information und Download Center

https://www.automation.siemens.com/mcms/infocenter/content/en/Pages/order_form.aspx

Technical documentation

<http://w3.siemens.com/mcms/mc-solutions/en/motion-control/support/technical-documentation/Pages/technical-documentation.aspx>

Industry Mall

<https://eb.automation.siemens.com/mall/en/WW/Catalog/Product/6SL3000-0CE33-3AA0/all>

Industry Online Support

<http://support.automation.siemens.com/WW/view/en/6SL3000-0CE33-3AA0/all>