

SINAMICS LINE REACTOR INPUT: 3-PH. 660-690 V, 50/60 HZ, 230 A

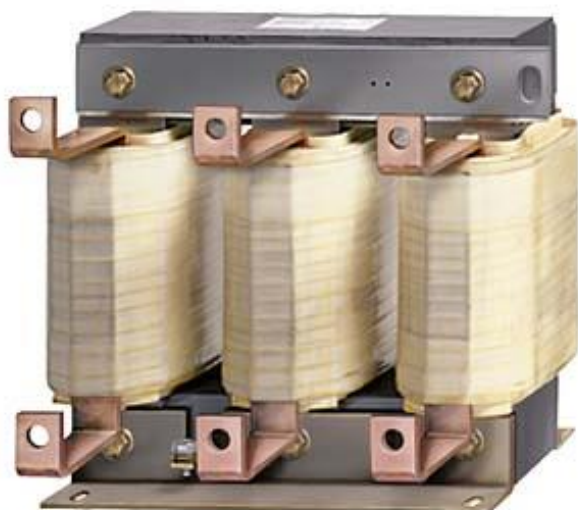


Figure similar

Order number	
Phase number / of the input voltage	3
Type of voltage / of the input voltage	AC
Input voltage	660 ... 690
Output current / rated value	230 A
Power loss [W]	
• at 50 Hz	Wert fehlt!
• at 60 Hz	Wert fehlt!
Type of electrical connection	
• for mains supply line	1 x hole for M10
• for load-side outgoing feeder	1 x hole for M10
Type of connectable conductor cross-section / for load-side outgoing feeder	Wert fehlt!
Connectable conductor cross-section	
• for mains supply line	Wert fehlt!
Type of electrical connection / for PE conductor	M6 screw
Protection class IP	IP00
Width	270 mm

Height	248 mm
Depth	200 mm
Net weight	31.1 kg
Certificate of suitability	cURus

Further information

Information und Download Center

https://www.automation.siemens.com/mcms/infocenter/content/en/Pages/order_form.aspx

Technical documentation

<http://w3.siemens.com/mcms/mc-solutions/en/motion-control/support/technical-documentation/Pages/technical-documentation.aspx>

Industry Mall

<https://eb.automation.siemens.com/mall/en/WW/Catalog/Product/6SL3000-0CH32-2AA0/all>

Industry Online Support

<http://support.automation.siemens.com/WW/view/en/6SL3000-0CH32-2AA0/all>