

SIEMENS

Data sheet for SINAMICS Power Module PM230

No image
available for this
configuration.

Figure similar

MLFB-Ordering data

6SL3223-0DE27-5AA1

Client order no. :
Order no. :
Offer no. :
Remarks :

Item no. :
Consignment no. :
Project :

Rated data		General tech. specifications	
Input		Power factor λ	0.90
Number of phases	3 AC	Offset factor $\cos \varphi$	0.95
Line voltage	380 ... 480 V $\pm 10\%$	Efficiency η	0.97
Line frequency	47 ... 63 Hz	Sound pressure level (1m)	63 dB
Rated current (LO)	19.00 A	Power loss	0.24 kW
Rated current (HO)	14.00 A	Filter class (integrated)	Class A
Output		Ambient conditions	
Number of phases	3 AC	Cooling	Internal air cooling
Rated voltage	400 V	Cooling air requirement	0.009 m³/s (0.318 ft³/s)
Rated current (LO)	18.00 A	Installation altitude	1000 m (3280.84 ft)
Rated current (HO)	13.20 A	Ambient temperature	
Max. output current	27.00 A	Operation LO	-10 ... 40 °C (14 ... 104 °F)
Rated power IEC 400V (LO)	7.50 kW	Operation HO	-10 ... 50 °C (14 ... 122 °F)
Rated power NEC 480V (LO)	10.00 hp	Transport	-25 ... 55 °C (-13 ... 131 °F)
Rated power IEC 400V (HO)	5.50 kW	Storage	-25 ... 55 °C (-13 ... 131 °F)
Rated power NEC 480V (HO)	7.50 hp	Relative humidity	
Pulse frequency	4 kHz	Max. operation	95 % RH, condensation not permitted
Output frequency for vector control	0 ... 200 Hz		
Output frequency for V/f control	0 ... 550 Hz		
Overload capability			
Low Overload (LO)			
1.1 x rated output current (i.e. 110 % overload) for 57 s with a cycle time of 300 s		1.5 x rated output current (i.e. 150 % overload) for 3 s with a cycle time of 300 s	
High Overload (HO)			
1.5 x output current rating (i.e., 150 % overload) for 57 s with a cycle time of 300 s		2 x output current rating (i.e., 200 % overload) for 3 s with a cycle time of 300 s	

SIEMENS

Data sheet for SINAMICS Power Module PM230

No image
available for this
configuration.


MLFB-Ordering data6SL3223-0DE27-5AA1

Figure similar

Mechanical data	Connections
Degree of protection	IP55 / UL type 12
Size	FSB
Net weight	6.30 kg (13.89 lb)
Width	180 mm (7.09 in)
Height	540 mm (21.26 in)
Depth	249 mm (9.80 in)
Line side	
Version	Plug-in screw terminals
Conductor cross-section	4.00 ... 6.00 mm² (AWG 12 ... AWG 10)
Motor end	
Version	Plug-in screw terminals
Conductor cross-section	4.00 ... 6.00 mm² (AWG 12 ... AWG 10)

Converter losses to EN 50598-2*

Efficiency class	IE2
Comparison with the reference converter (90% / 100%)	-67.81 %

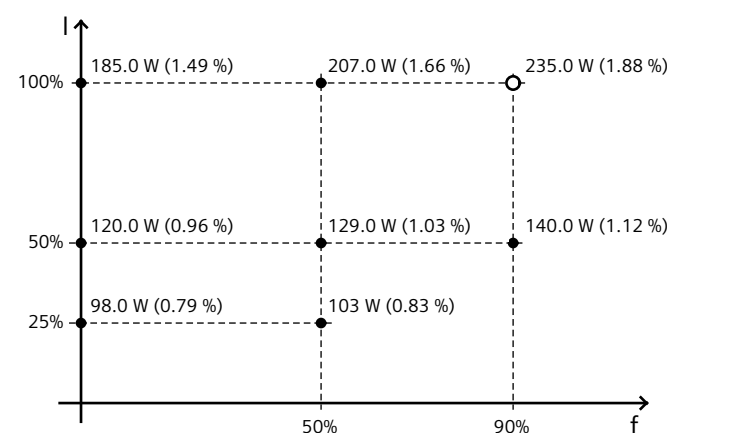

The percentage values show the losses in relation to the rated apparent power of the converter.

The diagram shows the losses for the points (as per standard EN 50598) of the relative torque generating current (I) over the relative motor stator frequency(f). The values are valid for the basic version of the converter without options/components.

*converted values

Max. motor cable length

Shielded	25 m (82.02 ft)
Unshielded	100 m (328.08 ft)

Standards

Compliance with standards	UL, CE, C-Tick (RCM)
---------------------------	----------------------

CE marking	Low-voltage directive 2006/95/EC
------------	----------------------------------