



Figure similar

MLFB-Ordering data

6SL3225-0BE34-5UA0

Client order no. :

Order no. :

Offer no. :

Remarks :

Item no. :

Consignment no. :

Project :

Rated data		General tech. specifications	
Input		Power factor λ	0.90
Number of phases	3 AC	Offset factor $\cos \varphi$	0.95
Line voltage	380 ... 480 V ± 10 %	Efficiency η	0.97
Line frequency	47 ... 63 Hz	Sound pressure level (1m)	60 dB
Rated current (LO)	102.00 A	Power loss	1.42 kW
Rated current (HO)	84.00 A	Filter class (integrated)	-
Output		Ambient conditions	
Number of phases	3 AC	Cooling	Internal air cooling
Rated voltage	400 V	Cooling air requirement	0.094 m ³ /s (3.320 ft ³ /s)
Rated current (LO)	110.00 A	Installation altitude	1000 m (3280.84 ft)
Rated current (HO)	90.00 A	Ambient temperature	
Max. output current	180.00 A	Operation LO	0 ... 40 °C (32 ... 104 °F)
Rated power IEC 400V (LO)	55.00 kW	Operation HO	0 ... 50 °C (32 ... 122 °F)
Rated power NEC 480V (LO)	75.00 hp	Transport	-25 ... 55 °C (-13 ... 131 °F)
Rated power IEC 400V (HO)	45.00 kW	Storage	-25 ... 55 °C (-13 ... 131 °F)
Rated power NEC 480V (HO)	60.00 hp	Relative humidity	
Pulse frequency	4 kHz	Max. operation	95 % RH, condensation not permitted
Output frequency for vector control	0 ... 200 Hz		
Output frequency for V/f control	0 ... 550 Hz		

Overload capability

Low Overload (LO)

1.1 x rated output current (i.e. 110 % overload) for 57 s with a cycle time of 300 s 1.5 x rated output current (i.e. 150 % overload) for 3 s with a cycle time of 300 s

High Overload (HO)

1.5 x output current rating (i.e., 150 % overload) for 57 s with a cycle time of 300 s 2 x output current rating (i.e., 200 % overload) for 3 s with a cycle time of 300 s

SIEMENS

Data sheet for SINAMICS Power Module PM250



Figure similar


MLFB-Ordering data

6SL3225-0BE34-5UA0

Mechanical data		Connections	
Degree of protection		Line side	
IP20 / UL open type			
Size		Version	
FSF		M8 bolt	
Net weight		Conductor cross-section	
35.00 kg (77.16 lb)		25.00 ... 120.00 mm² (AWG 4 ... AWG -3)	
Width		Motor end	
350 mm (13.78 in)			
Height		Version	
634 mm (24.96 in)		M8 bolt	
Depth		Conductor cross-section	
316 mm (12.44 in)		25.00 ... 120.00 mm² (AWG 4 ... AWG -3)	

Converter losses to EN 50598-2*

Efficiency class	IE2
Comparison with the reference converter (90% / 100%)	-56.12 %

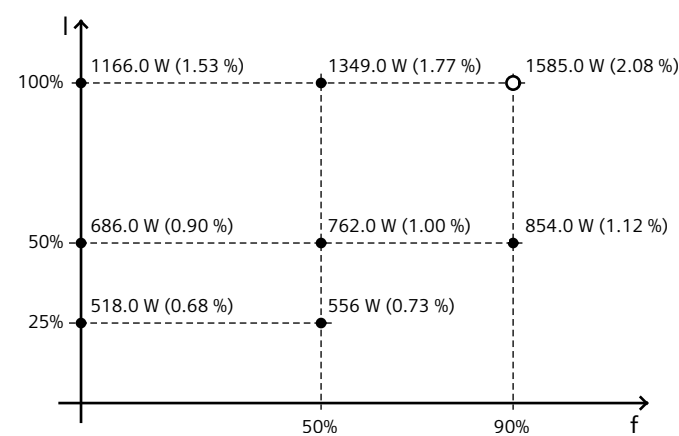

The percentage values show the losses in relation to the rated apparent power of the converter.

The diagram shows the losses for the points (as per standard EN 50598) of the relative torque generating current (I) over the relative motor stator frequency(f). The values are valid for the basic version of the converter without options/components.

*converted values

Connections	
Line side	
Version	
M8 bolt	
Conductor cross-section	
25.00 ... 120.00 mm² (AWG 4 ... AWG -3)	
Motor end	
Version	
M8 bolt	
Conductor cross-section	
25.00 ... 120.00 mm² (AWG 4 ... AWG -3)	

Max. motor cable length	
Shielded	50 m (164.04 ft)
Unshielded	100 m (328.08 ft)

Standards	
Compliance with standards	CE, C-Tick (RCM)

CE marking	Low-voltage directive 2006/95/EC
------------	----------------------------------