

Data sheet for SINAMICS G150



MLFB-Ordering data: 6SL3710-1GE32-1AA3-Z
D58+L26+L50+M06+M54

Client order no.:
Order no.:
Offer no.:
Remarks:

Item no.:
Consignment no.:
Project:

Rated data

Input

Supply frequency	47...63 Hz
Input supply voltage	400 V $\pm 10\%$
Rated input current	229 A
Max. current	335 A
Pulse number	6
Regenerative capability	No (2Q)

Output:

Output voltage	400 V
Rated output (LO) in kW	110 kW
Rated power (HO) in kW	90 kW
Rated output current	196 A
Rated output current (LO)	191 A
Rated output current (HO)	166 A
Output current Max	307 A
Pulse frequency (default setting)	2 kHz

Basic data:

Power losses ΔP	2.9 kW
Power loss including options	2.9 kW
Sound pressure level L_{pA} (1 m)	67 dB
Conductor cross section, max. (IEC)	4 x 240 mm ²
Degree of protection	IP54
Dimensions (H x W x D)	2500 mm x 800 mm x 600 mm
Weight approx.	460 kg
Frame size	F
Type	A
Color, paint shade	RAL7035

Environmental conditions

Installation altitude	1000 m
Coolant	Air
Air cooling requirements	0.17 m ³ /s
Ambient temperature	0 °C - +40 °C


Converter losses to EN 50598-2*

Efficiency class

IE2

Comparison with the reference converter (90% / 100%)

-52.47 %

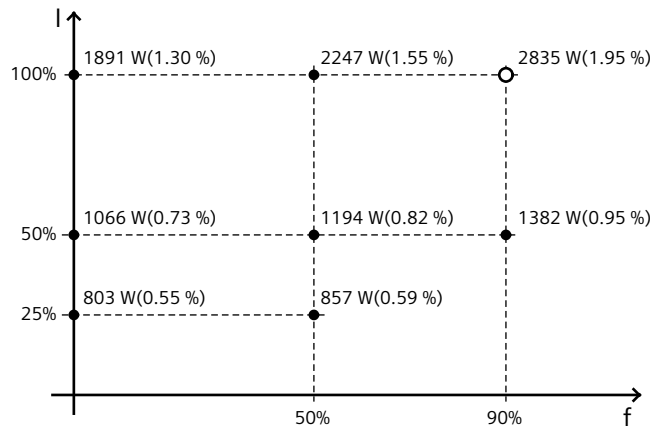

The percentage values show the losses in relation to the rated apparent power of the converter.

The diagram shows the losses for the points (as per standard EN 50598) of the relative torque generating current (I) over the relative motor stator frequency (f). The values are valid for the basic version of the converter including line choke without options/components.

*converted values

Special design

D58	Documentation language: English/French
L26	Main switch including fuses or circuit breaker
L50	Cabinet lighting with service socket outlet
M06	Base 100 mm high, RAL 7022
M54	IP54 degree of protection