

Data sheet for SINAMICS G150



MLFB-Ordering data: 6SL3710-1GE32-6AA3-Z
G60+L61+M54

Client order no.:

Order no.:

Offer no.:

Remarks:

Item no.:

Consignment no.:

Project:

Rated data

Input

Supply frequency	47...63 Hz
Input supply voltage	400 V $\pm 10\%$
Rated input current	284 A
Max. current	410 A
Pulse number	6
Regenerative capability	No (2Q)

Output:

Output voltage	400 V
Rated output (LO) in kW	132 kW
Rated power (HO) in kW	110 kW
Rated output current	243 A
Rated output current (LO)	233 A
Rated output current (HO)	217 A
Output current Max	375 A
Pulse frequency (default setting)	2 kHz

Basic data:

Power losses ΔP	3.72 kW
Power loss including options	3.72 kW
Sound pressure level L_{pA} (1 m)	69 dB
Conductor cross section, max. (IEC)	4 x 240 mm ²
Degree of protection	IP54
Dimensions (H x W x D)	2400 mm x 800 mm x 600 mm
Weight approx.	460 kg
Frame size	F
Type	A
Color, paint shade	RAL7035

Environmental conditions

Installation altitude	1000 m
Coolant	Air
Air cooling requirements	0.23 m ³ /s
Ambient temperature	0 °C - +40 °C


Converter losses to IEC61800-9-2*

Efficiency class

IE2

Comparison with the reference converter (90% / 100%)

50.5 %

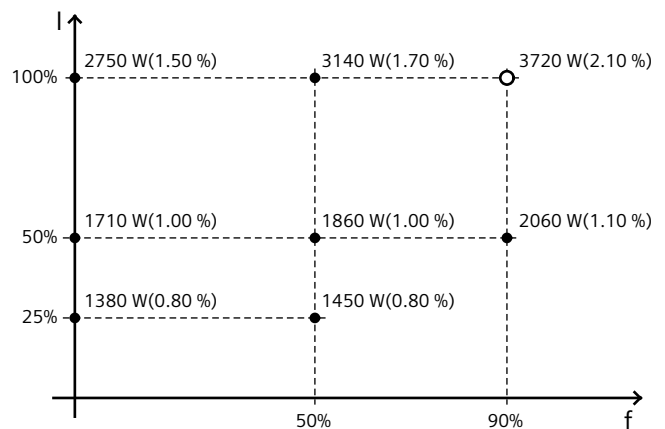

The percentage values show the losses in relation to the rated apparent power of the converter.

The diagram shows the losses for the points (as per standard IEC61800-9-2) of the relative torque generating current (I) over the relative motor stator frequency (f). The values are valid for the basic version of the converter including line choke without options/components.

*converted values

Special design

G60	TM31 customer terminal strip
L61	25 kW braking module (P20 power: 100 kW)
M54	IP54 degree of protection