

Data sheet for SINAMICS G150



MLFB-Ordering data: **6SL3710-2GH41-1AA3-Z**
K74

Client order no.:

Order no.:

Offer no.:

Remarks:

Item no.:

Consignment no.:

Project:

Rated data

Input

Supply frequency	47...63 Hz
Input supply voltage	690 V $\pm$ 10%
Rated input current	1116 A
Max. current	1708 A
Pulse number	12
Regenerative capability	No (2Q)

Output:

Output voltage	690 V
Rated output (LO) in kW	1000 kW
Rated power (HO) in kW	900 kW
Rated output current	1070 A
Rated output current (LO)	1036 A
Rated output current (HO)	950 A

Pulse frequency (default setting)	1.25 kHz
-----------------------------------	----------

Basic data:

Power losses ΔP	21.3 kW
Power loss including options	21.3 kW
Sound pressure level L_{pA} (1 m)	75 dB
Conductor cross section, max. (IEC)	4 x 240 mm ²
Degree of protection	IP20
Dimensions (H x W x D)	2000 mm x 2400 mm x 600 mm
Weight approx.	1700 kg
Frame size	HX
Type	A
Color, paint shade	RAL7035

Environmental conditions

Installation altitude	1000 m
Coolant	Air
Air cooling requirements	1.56 m ³ /s
Ambient temperature	0 °C - +40 °C


Converter losses to EN 50598-2*

Efficiency class

IE2

Comparison with the reference converter (90% / 100%)

-65 %

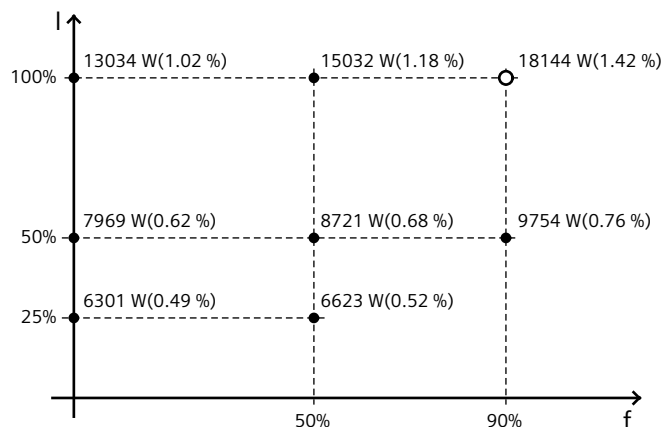

The percentage values show the losses in relation to the rated apparent power of the converter.

The diagram shows the losses for the points (as per standard EN 50598) of the relative torque generating current (I) over the relative motor stator frequency (f). The values are valid for the basic version of the converter including line choke without options/components.

*converted values

Special design

K74 Supply of Cabinet internal AC 230 V auxiliary power