

RIM 2 24/60VDC**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com**Product image**

Similar to illustration

Pluggable protective modules for the D-SERIES relay sockets, with optional protective functions.

- With green LED and free-wheeling diode

General ordering data

Version	D-SERIES, LED module with freewheel diode, Rated control voltage: 24...60 V DC, Plug-in connection
Order No.	7760056016
Type	RIM 2 24/60VDC
GTIN (EAN)	4032248878123
Qty.	10 pc(s).

Creation date March 29, 2021 8:41:57 PM CEST

Catalogue status 12.03.2021 / We reserve the right to make technical changes.

RIM 2 24/60VDC

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data

Dimensions and weights

Depth	32 mm	Depth (inches)	1.26 inch
Height	8.6 mm	Height (inches)	0.339 inch
Net weight	2 g	Width	12.4 mm
Width (inches)	0.488 inch		

Environmental Product Compliance

REACH SVHC	Lead 7439-92-1
------------	----------------

Control side

Protective circuit	Free-wheeling diode	Rated control voltage	24...60 V DC
Status indicator	Green LED		

General data

Colour	black		
UL94 flammability rating component	Component	Housing	
	UL94 flammability rating	V-2	

Connection data

Wire connection method	Plug-in connection
------------------------	--------------------

Classifications

ETIM 6.0	EC002586	ETIM 7.0	EC002586
ECLASS 9.1	27-37-10-10	ECLASS 10.0	27-37-10-10
ECLASS 11.0	27-37-16-92		

Approvals

Approvals



ROHS	Conform
------	---------

Downloads

Engineering Data	STEP
Engineering Data	EPLAN, WSCAD


RIM 2 24/60VDC

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany

www.weidmueller.com

Drawings

Wiring diagram

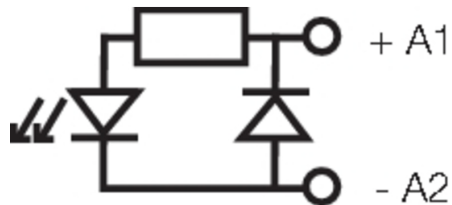

Dimensional drawing

