

**DRM570048LT****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

[www.weidmueller.com](http://www.weidmueller.com)**Product image**

Similar to illustration

Individual relays within the D-SERIES DRM

- 4 CO contacts
- AC coils
- With integrated status LED and test button

**General ordering data**

|            |                                                                                                                                                                              |
|------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Version    | D-SERIES DRM, Relay, Number of contacts: 4, CO contact, AgNi 0,15 µm Au, AgNi flash gold-plated, Rated control voltage: 48 V DC, Continuous current: 5 A, Plug-in connection |
| Order No.  | <a href="#">7760056098</a>                                                                                                                                                   |
| Type       | DRM570048LT                                                                                                                                                                  |
| GTIN (EAN) | 4032248855667                                                                                                                                                                |
| Qty.       | 20 pc(s).                                                                                                                                                                    |

Creation date March 29, 2021 8:46:11 PM CEST

Catalogue status 12.03.2021 / We reserve the right to make technical changes.

# DRM570048LT

**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

[www.weidmueller.com](http://www.weidmueller.com)

## Technical data

### Dimensions and weights

|                |            |                 |            |
|----------------|------------|-----------------|------------|
| Depth          | 35.7 mm    | Depth (inches)  | 1.406 inch |
| Height         | 27.4 mm    | Height (inches) | 1.079 inch |
| Net weight     | 35.3 g     | Width           | 21 mm      |
| Width (inches) | 0.827 inch |                 |            |

### Temperatures

|                     |                                          |                       |                |
|---------------------|------------------------------------------|-----------------------|----------------|
| Storage temperature | -40 °C...70 °C                           | Operating temperature | -40 °C...60 °C |
| Humidity            | 35...85 % rel. humidity, no condensation |                       |                |

### Environmental Product Compliance

|            |                |
|------------|----------------|
| REACH SVHC | Lead 7439-92-1 |
|------------|----------------|

### Rated data UL

|                         |         |
|-------------------------|---------|
| Certificate No. (cURus) | E312083 |
|-------------------------|---------|

### Control side

|                                |                        |                       |           |
|--------------------------------|------------------------|-----------------------|-----------|
| Coil resistance                | 2600 $\Omega \pm 10\%$ | Power rating          | 0.9 W     |
| Pull-in/drop-out voltage, typ. | 36 V / 4.8 V DC        | Rated control voltage | 48 V DC   |
| Rated current DC               | 18.5 mA                | Status indicator      | Green LED |

### Load side

|                                         |              |                      |                            |
|-----------------------------------------|--------------|----------------------|----------------------------|
| AC switching capacity (resistive), max. | 1250 VA      | Continuous current   | 5 A                        |
| DC switching capacity (resistive), max. | 120 W @ 24 V | Inrush current       | 10 A / 50 ms               |
| Max. switching frequency at rated load  | 0.1 Hz       | Min. switching power | 10 mA @ 12 V, 100 mA @ 5 V |
| Rated switching voltage                 | 250 V AC     | Switch-off delay     | $\leq 20$ ms               |
| Switch-on delay                         | $\leq 20$ ms |                      |                            |

### Contact data

|                         |                                                             |                    |                      |
|-------------------------|-------------------------------------------------------------|--------------------|----------------------|
| Contact type            | 4 CO contact (AgNi 0,15 $\mu$ m Au, AgNi flash gold-plated) | Contact resistance | $\leq 50$ m $\Omega$ |
| Mechanical service life | 20 x 10 <sup>6</sup> switching cycles                       |                    |                      |

### General data

|                                      |                          |                        |
|--------------------------------------|--------------------------|------------------------|
| Test button                          | yes (lockable)           |                        |
| Mechanical switch position indicator | Yes                      |                        |
| Colour                               | Transparent              |                        |
| UL94 flammability rating component   | Component                | Relay cover            |
|                                      | UL94 flammability rating | V-2                    |
|                                      | Component                | Relay baseplate        |
|                                      | UL94 flammability rating | V-0                    |
|                                      | Component                | Relay status indicator |
|                                      | UL94 flammability rating | HB                     |
|                                      | Component                | Relay test button      |
|                                      | UL94 flammability rating | HB                     |

Creation date March 29, 2021 8:46:11 PM CEST

## DRM570048LT

Weidmüller Interface GmbH &amp; Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Technical data

## Insulation coordination

|                                                |                             |                                              |                                |
|------------------------------------------------|-----------------------------|----------------------------------------------|--------------------------------|
| Creepage and clearance distance input – output | $\geq 5.5 \text{ mm}$       | Dielectric strength of neighbouring contacts | 1 kV <sub>eff</sub> / 1 min    |
| Dielectric strength of open contact            | 1 kV <sub>eff</sub> / 1 min | Dielectric strength, Input/Output            | 1.8 kV <sub>eff</sub> / 1 min. |
| Impulse withstand voltage                      | 6 kV (1.2/50 $\mu$ s)       | Pollution severity                           | 2                              |
| Protection degree                              | IP20                        | Rated voltage                                | 250 V                          |
| Surge voltage category                         | III                         |                                              |                                |

## Further details of approvals / standards

|           |                                                                                      |                         |         |
|-----------|--------------------------------------------------------------------------------------|-------------------------|---------|
| Standards | IEC 61810-1, EN 60664-1:2007, EN 61000-6-2:2005, EN 61000-6-4:2007 + A1:2011, UL 508 | Certificate No. (cURus) | E312083 |
|-----------|--------------------------------------------------------------------------------------|-------------------------|---------|

## Connection data

|                        |                    |
|------------------------|--------------------|
| Wire connection method | Plug-in connection |
|------------------------|--------------------|

## Classifications

|             |             |             |             |
|-------------|-------------|-------------|-------------|
| ETIM 6.0    | EC001437    | ETIM 7.0    | EC001437    |
| ECLASS 9.0  | 27-37-16-01 | ECLASS 9.1  | 27-37-16-01 |
| ECLASS 10.0 | 27-37-16-01 | ECLASS 11.0 | 27-37-16-01 |

## Approvals

Approvals



|                       |         |
|-----------------------|---------|
| ROHS                  | Conform |
| UL File Number Search | E312083 |

## Downloads

|                                             |                                                                         |
|---------------------------------------------|-------------------------------------------------------------------------|
| Approval/Certificate/Document of Conformity | <a href="#">EU Konformitätserklärung / EU Declaration of Conformity</a> |
| Engineering Data                            | <a href="#">STEP</a>                                                    |
| Engineering Data                            | <a href="#">EPLAN, WSCAD</a>                                            |


## DRM570048LT

**Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 26  
D-32758 Detmold  
Germany


[www.weidmueller.com](http://www.weidmueller.com)

## Drawings


### Wiring diagram

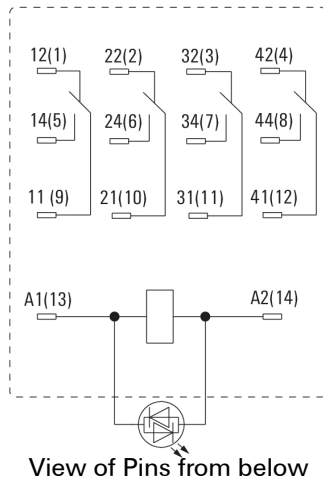


### Graph

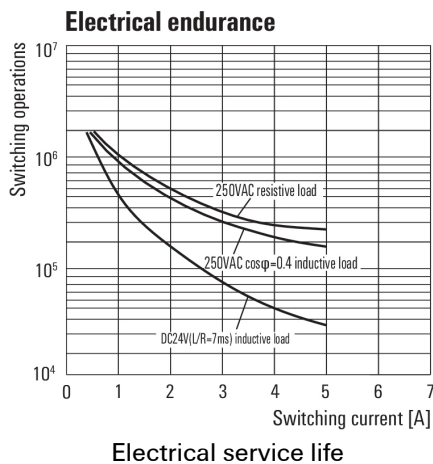


### Dimensional drawing

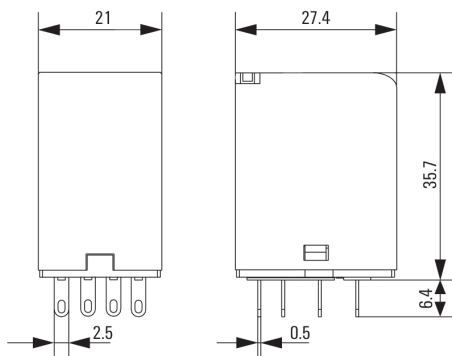

### Graph

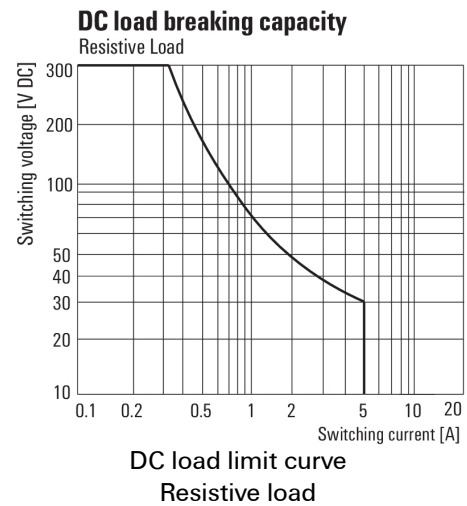

### Graph

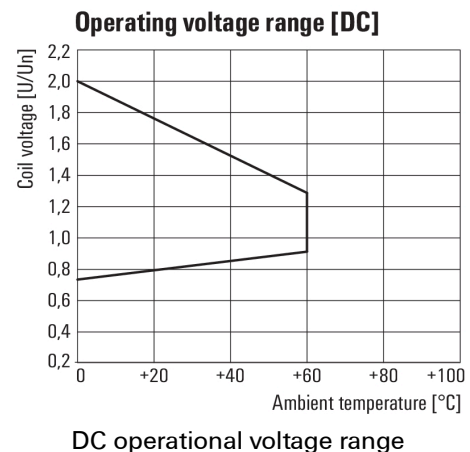


**DRM570048LT****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

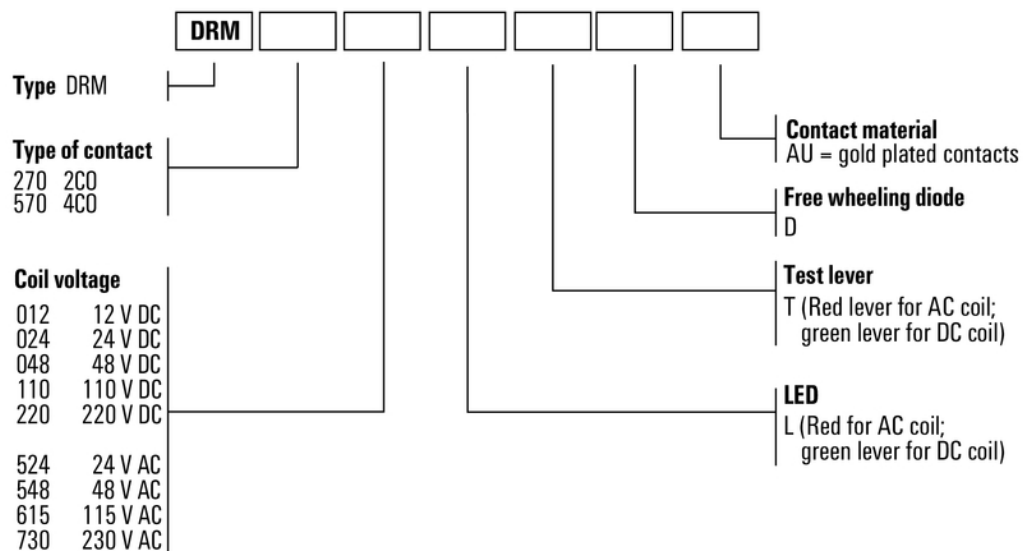[www.weidmueller.com](http://www.weidmueller.com)**Drawings****Miscellaneous**

Type codes