Product data sheet

PLUG-IN EXPANSION MODULE PAC 4DI/2DO



Similar to image

General technical details:					
Product designation		expansion module PAC 4DI/2DO			
Mounting type		plug-in module for the module slot of the PAC4200			
Type of voltage supply		from PAC 4200			
Combustibility class acc. to UL 94		V 0			
MTBF	а	141.1			
Reference code					
 according to DIN 40719 extended according to IEC 204-2 / according to IEC 750 		P			
• according to DIN EN 61346-2		P			

Communication:				
Design of the electrical connection	screw-type terminals			
protocol / is supported	MODBUS			
Potential separation	Maximum insulation voltage: 500V AC			

Dimensions and weights:				
Width	mm	43		
Height	mm	63		
Depth	mm	22		

Degree of protection Protection class IP IP20 Ambient conditions: Ambient temperature • during operating °C -5 ... +55 Degree of pollution 2 according to IEC 61131

Certificates/approvals:

General Product Approval	EMC	Declaration of Conformity	other	
PG	C	CE	Confirmation	Declaration of Conformity

Further information:

GOST

Information- and Downloadcenter (Catalogs, Brochures,...)

C-TICK

http://www.siemens.com/lowvoltage/catalogs

Industry Mall (Online ordering system)

https://eb.automation.siemens.com/mall/en/WW/Catalog/Product/7KM9200-0AB00-0AA0

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

http://support.automation.siemens.com/WW/view/en/7KM9200-0AB00-0AA0/all


Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)


EG-Konf.

 $\underline{\text{http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=7KM9200-0AB00-0AA0}$

CAx-Online-Generator

http://www.siemens.com/cax

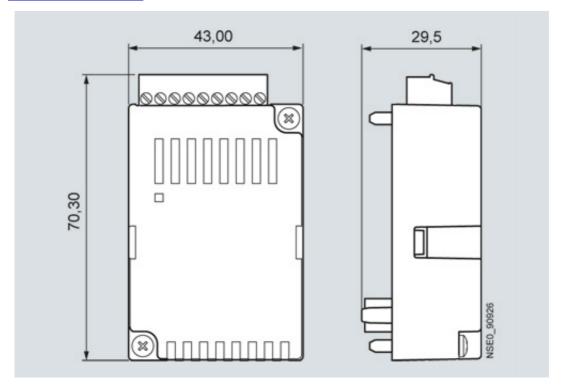

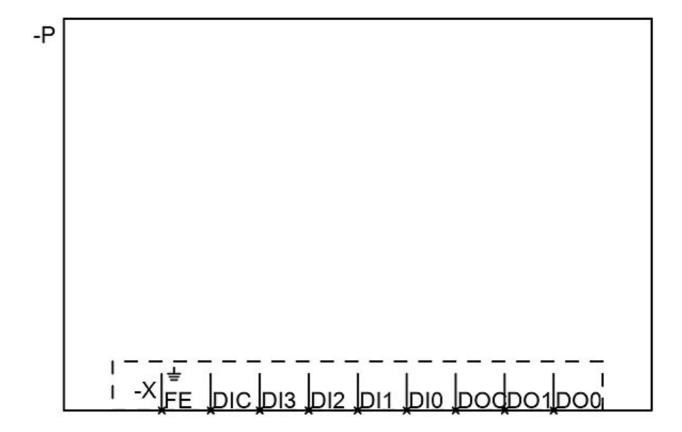

last change: Jul 7, 2014