

PLUG-IN COMMUNICATIONS MODULE PROFIBUS DP V1



Similar to image

General technical details:		
Product designation		expansion module PAC Profibus DP
Mounting type		plug-in module for the module slot of the PAC3200 / 4200
Type of voltage supply		from PAC 3200 / 4200
Combustibility class acc. to UL 94		V 0
MTBF	a	141.1
Reference code		
• according to DIN 40719 extended according to IEC 204-2 / according to IEC 750		P
• according to DIN EN 61346-2		P
Communication:		
Design of the electrical connection		9-pole Sub-D plug according to IEC 61158
protocol / is supported		Profibus DP V1/V2
Potential separation		Maximum insulation voltage: 500V AC
Dimensions and weights:		
Width	mm	43
Height	mm	63
Depth	mm	22

Degree of protection

Protection class IP

IP20

Ambient conditions:

Ambient temperature

- during operating

°C

-5 ... +55

Degree of pollution

2 according to IEC 61131

Transfer rate / min.

kbit/s

9.6

Transfer rate / maximum

kbit/s

12,000

Certificates/approvals:

General Product
Approval

EMC

Declaration of
Conformity

other



[Confirmation](#)

Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://eb.automation.siemens.com/mall/en/WW/Catalog/Product/7KM9300-0AB00-0AA0>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)



<http://support.automation.siemens.com/WW/view/en/7KM9300-0AB00-0AA0/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=7KM9300-0AB00-0AA0


CAX-Online-Generator

<http://www.siemens.com/cax>

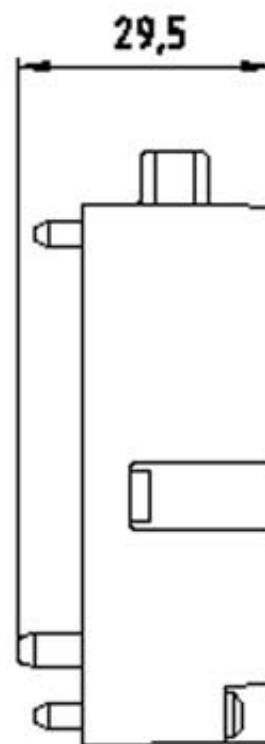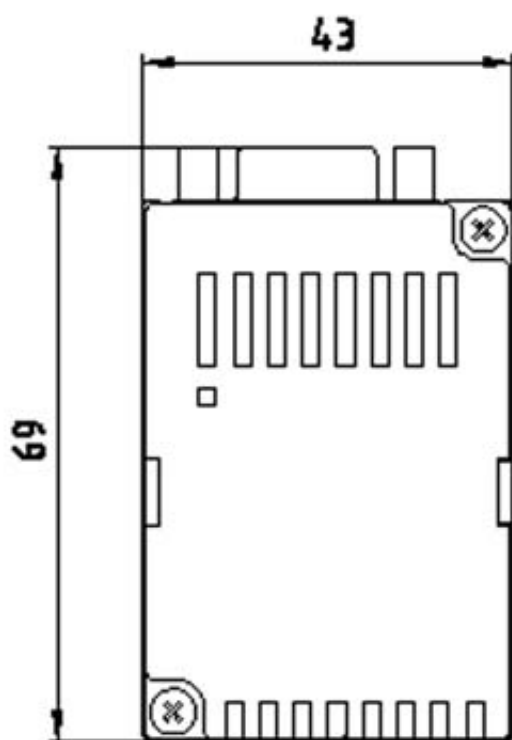

-P

PROFIBUS DP

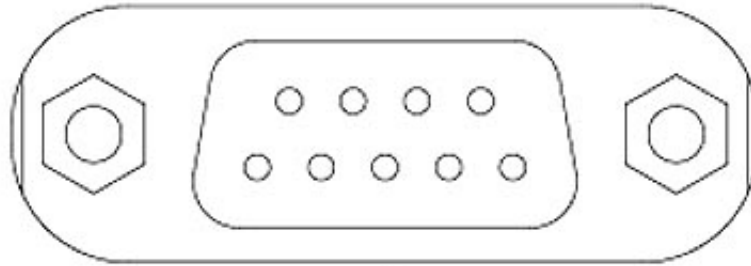

DP

last change:

May 19, 2014