



PLUG-IN COMMUNICATIONS MODULE SWITCHED
ETHERNET PROFINET

Similar to image

General technical details:

Product designation		Switched Ethernet Profinet module
Mounting type		plug-in module for the module slot of the PAC3200 / 4200
Type of voltage supply		from PAC 3200 / 4200
Combustibility class acc. to UL 94		V 0
MTBF	a	215.6
Reference code		
• according to DIN 40719 extended according to IEC 204-2 / according to IEC 750 • according to DIN EN 61346-2		P
		P

Communication:

Design of the electrical connection		2 x RJ45 socket
protocol / is supported		PROFINET IO / Modbus TCP
Potential separation		Maximum insulation voltage: 500V AC

Dimensions and weights:

Width	mm	43
Height	mm	63
Depth	mm	22

Degree of protection

Protection class IP

IP20

Ambient conditions:

Ambient temperature

- during operating

°C

-5 ... +55

Degree of pollution

2 according to IEC 61131

Transfer rate / min.

kbit/s

10,000

Transfer rate / maximum

kbit/s

100,000

Certificates/approvals:

General Product
Approval

EMC

Declaration of
Conformity

other



GOST



C-TICK



EG-Konf.

[Confirmation](#)

[PROFINET-
Certification](#)

Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://eb.automation.siemens.com/mall/en/WW/Catalog/Product/7KM9300-0AE00-0AA0>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)



<http://support.automation.siemens.com/WW/view/en/7KM9300-0AE00-0AA0/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=7KM9300-0AE00-0AA0

CAX-Online-Generator

<http://www.siemens.com/cax>

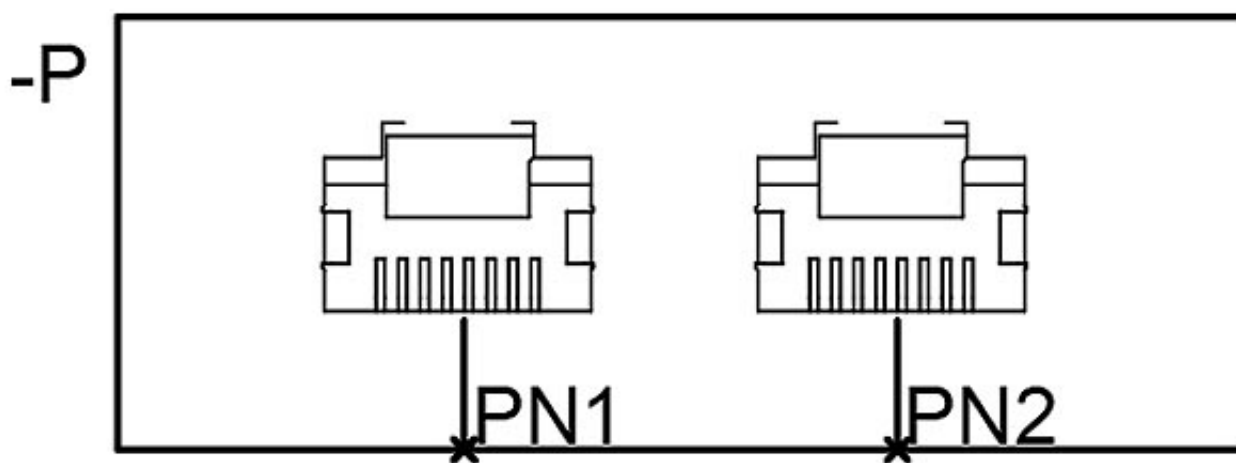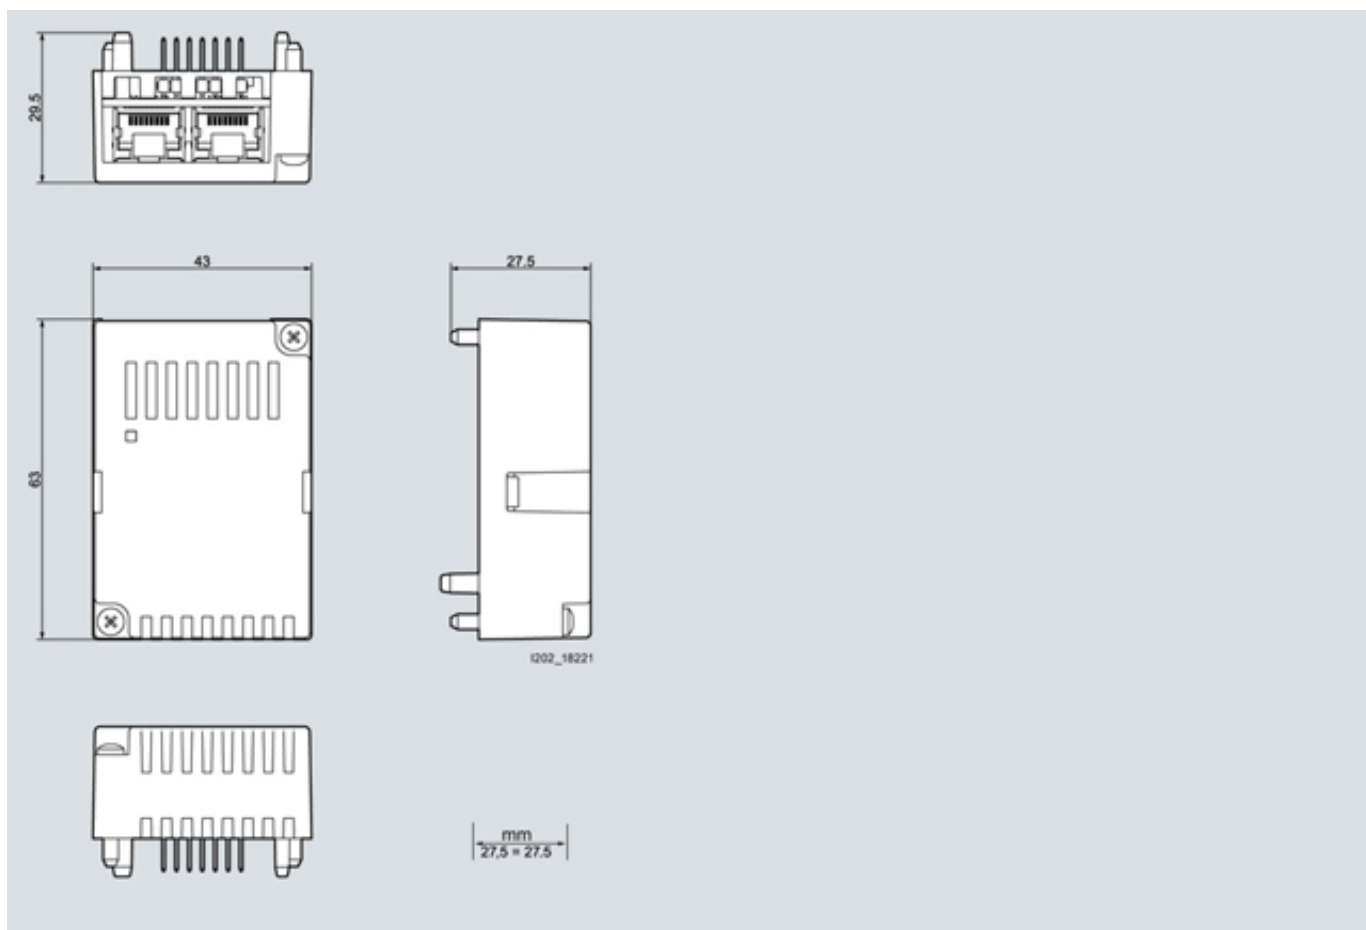

last change:

Jul 7, 2014