



expansion module switched Ethernet PROFINET, plug-in, for 7KM
PAC3200 / 4200 / 3VA COM100 / 800

Model			
product brand name		SENTRON	
product designation		Switched Ethernet PROFINET expansion module	
type of voltage supply		via PAC 3200 / PAC4200 / COM100 / 800	
General technical data			
MTBF		215.6 a	
galvanic isolation		Maximum insulation voltage: 500V AC	
reference code according to DIN 40719 extended		P	
according to IEC 204-2 according to IEC 750			
degree of pollution		2 according to IEC 61131	
Protection class			
protection class IP		IP20	
combustibility class according to UL 94		V 0	
suitability for use		7KM PAC 3200 / PAC 4200 / 3VA COM100 / 800	
• reactive power meter		No	
Connections			
type of electrical connection		2 x RJ45 socket	
Mechanical Design			
height		63 mm	
width		43 mm	
depth		22 mm	
fastening method		pluggable	
Environmental conditions			
ambient temperature during operation			
• minimum		-5 °C	
• maximum		55 °C	
ambient temperature during storage			
• minimum		-25 °C	
• maximum		70 °C	
Certificates			
reference code according to EN 61346-2		P	
General Product Approval		EMC	Declaration of Conformity

[Confirmation](#)

[KC](#)



EG-Konf.

other

Further information

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=7KM9300-0AE01-0AA0>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/7KM9300-0AE01-0AA0>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)




http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=7KM9300-0AE01-0AA0

CAX-Online-Generator


<http://www.siemens.com/cax>

Tender specifications

<http://www.siemens.com/specifications>

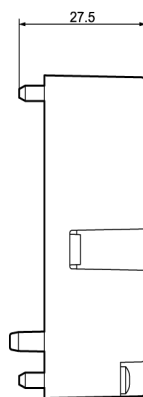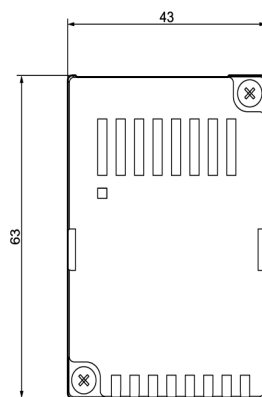

I202_18221



mm
27.5 = 27.5



