



weekly time switch Profi digital 24 V 16A 2-channel 2MW

Model	
product brand name	SETRON
product designation	Digital time switch
design of the product	Profi
design of the switching function	CO contact
General technical data	
principle of operation	
<ul style="list-style-type: none"> <li>• radio-controlled</li> </ul>	No
<ul style="list-style-type: none"> <li>• line-synchronous</li> </ul>	Yes
<ul style="list-style-type: none"> <li>• quartz-controlled</li> </ul>	No
accuracy per day	0.1 s
shortest switching time interval of channel 1	1 s
Voltage	
control voltage at AC rated value	
<ul style="list-style-type: none"> <li>• minimum</li> </ul>	24 V
<ul style="list-style-type: none"> <li>• maximum</li> </ul>	26 V
control voltage at DC rated value	
<ul style="list-style-type: none"> <li>• minimum</li> </ul>	24 V
<ul style="list-style-type: none"> <li>• maximum</li> </ul>	26 V
overvoltage category according to IEC 61010-1	III
Supply voltage	
operating voltage at AC rated value	250 V
type of voltage of the supply voltage	AC/DC
supply voltage frequency maximum	60 Hz
Protection class	
protection class IP	IP20
Switching capacity	
switching capacity current at AC at 250 V rated value	16 A
Dissipation	
power loss [W] for rated value of the current at AC in hot operating state per pole	1.5 W
Product function	
product function	
<ul style="list-style-type: none"> <li>• 60 min time program</li> </ul>	Yes
<ul style="list-style-type: none"> <li>• Astro program</li> </ul>	No
<ul style="list-style-type: none"> <li>• automatic daylight-saving adjustment</li> </ul>	Yes
<ul style="list-style-type: none"> <li>• operating hours counter</li> </ul>	Yes
<ul style="list-style-type: none"> <li>• direct operation</li> </ul>	Yes
<ul style="list-style-type: none"> <li>• holiday time program</li> </ul>	Yes
<ul style="list-style-type: none"> <li>• pulse program</li> </ul>	Yes

• annual time program	No
• switching preselection	Yes
• 24 hr time program	Yes
• text guidance in display	Yes
• weekly time program	Yes
• random time program	Yes
• cyclical time program	Yes

Number	
number of terminals with cross-head screw	1
number of channels	2
number of memory slots	28
connectable conductor cross-section in main circuit	
• for rigid conductor maximum	4 mm <sup>2</sup>
• for rigid conductor minimum	1.5 mm <sup>2</sup>
• for flexible conductor with core end processing maximum	2.5 mm <sup>2</sup>

Mechanical Design	
height	83 mm
width	36 mm
depth	70 mm
number of modular width units	2
fastening method	DIN rail
net weight	207 g

Environmental conditions	
ambient temperature during operation	
• minimum	-20 °C
• maximum	55 °C
ambient temperature during storage	
• minimum	-20 °C
• maximum	60 °C

General Product Approval	Declaration of Conformity
<a href="#">Confirmation</a>     	

other	Dangerous Good	Environment
<a href="#">Miscellaneous</a>	<a href="#">Confirmation</a>	<a href="#">Dangerous Goods Information</a>
		<a href="#">Environmental Confirmations</a>

### Further information

**Siemens has decided to exit the Russian market (see here).**  
<https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business>

**Siemens is working on the renewal of the current EAC certificates.**  
Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus).

**Information on the packaging**  
<https://support.industry.siemens.com/cs/ww/en/view/109813875>

**Information- and Downloadcenter (Catalogs, Brochures,...)**  
<http://www.siemens.com/lowvoltage/catalogs>



**Industry Mall (Online ordering system)**  
<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=7LF4522-2>

**Service&Support (Manuals, Certificates, Characteristics, FAQs,...)**  
<https://support.industry.siemens.com/cs/ww/en/ps/7LF4522-2>

**Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)**  
[http://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=7LF4522-2](http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=7LF4522-2)

**CAx-Online-Generator**  
<http://www.siemens.com/cax>

**Tender specifications**  
<http://www.siemens.com/specifications>

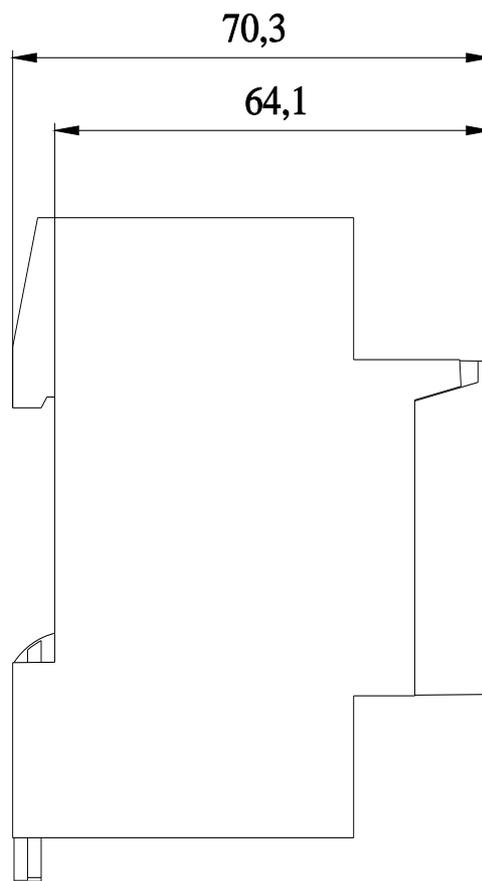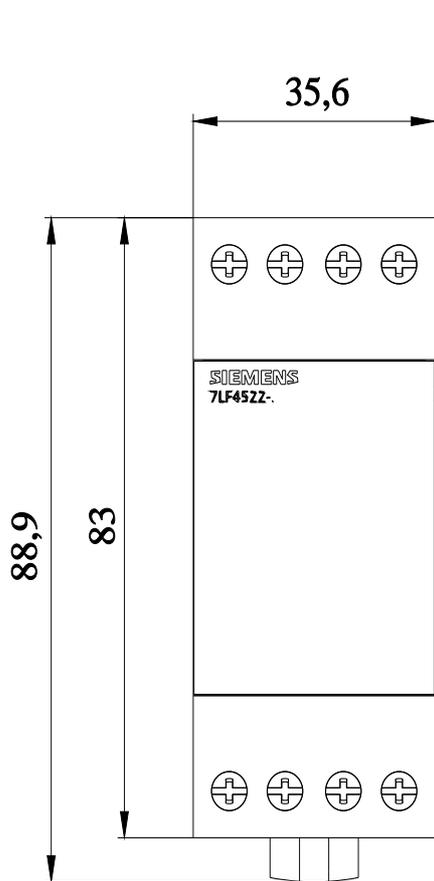

last modified:

2/8/2023 

