



DOORBELL/BUZZER UN= 12V PRIM. MOUNTING WIDTH 1MW MOUNTING DEPTH 64MM PV=4 VA

Similar to image

Technical data:		
Consumed standby current	A	0.33
type of voltage		AC
Type of mounting		mounting
Loudness level	dB	75
supply voltage / nominal value	V	12
Color / of the housing		gray
Material / of the enclosure		plastic
Product component / integrated / Transformer		No
Protection class IP		IP20
Design of the acoustic signal type		others

Certificates/approvals:	
General Product Approval	Declaration of Conformity



Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<http://www.siemens.com/lowvoltage/mall>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/7LQ2206-1/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)


http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=7LQ2206-1

CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

[Datanorm](#) [GAEB81](#) [GAEB83](#) [RTF](#) [TXT](#)

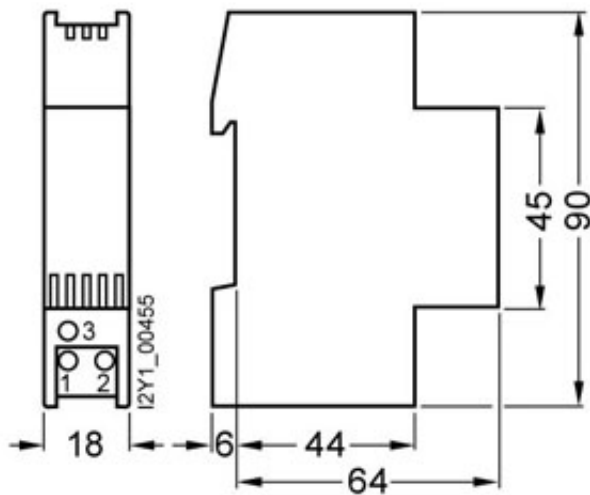

last change:

Sep 3, 2012