


INSULATION MONITOR T55 FOR MEDICALLY USED
ROOMS CON. F.TESTING A. INDIC. COMB. AC 230V
50/60HZ RAN 50-500 KOHM

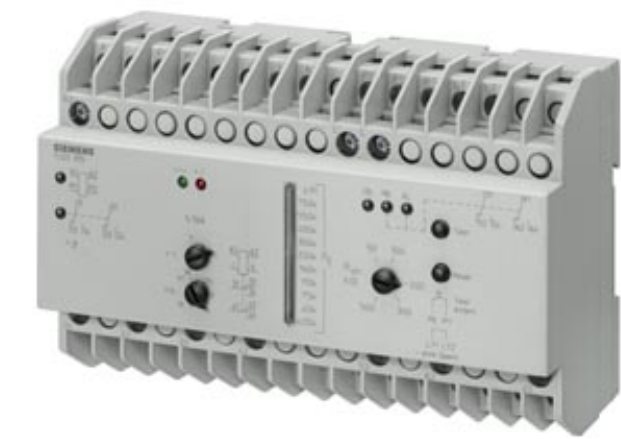

Similar to image

Technical data:		
Design of the electrical connection		screw-type terminals
Design of the acoustic signal type		For AC networks
Design of the electrical connection / jumper socket		No
Type of voltage / for operating		AC
Product function / defect storage		Yes
Number of NC contacts / for auxiliary contacts		0
Number of NO contacts / for auxiliary contacts		0
Number of change-over switches / for auxiliary contacts		2
Product component / isolation value indication		Yes
Operating voltage / rated value		
• maximum	V	300
• minimum	V	0
Adjustable response value impedance		
• 1 / initial value	kΩ	50
Operating frequency / rated value		
• minimum	Hz	1,000
• maximum	Hz	10
Adjustable response value impedance / 1 / final value	kΩ	500

Control supply voltage		
	• at 60 Hz / at AC / rated value	
	• minimum	V 230
	• maximum	V 230
	• at 50 Hz / at AC / rated value	
	• minimum	V 230
	• maximum	V 230
Depth	mm	59
Height	mm	90
Width	mm	140

Certificates/approvals:

General Product
Approval

Declaration of Conformity



Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<http://www.siemens.com/lowvoltage/mall>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)


<http://support.automation.siemens.com/WW/view/en/7LQ3355/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=7LQ3355

CAX-Online-Generator

<http://www.siemens.com/cax>

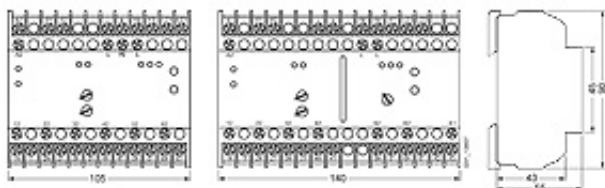

last change:

Feb 19, 2013