


**RSD 10 LP/LP****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

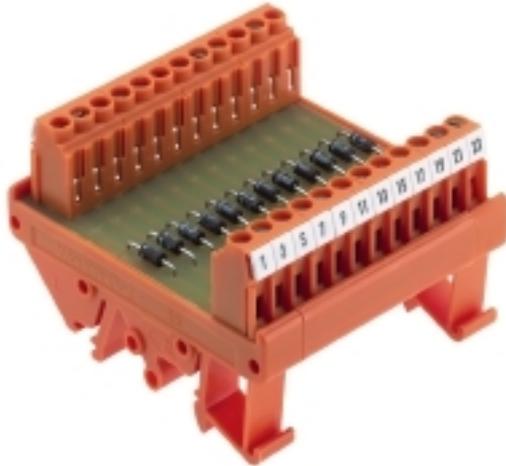

Similar to illustration

Interfaces with diodes for surge voltage protection, lamp testing or protection against reversed polarity.

**General ordering data**

Version	Interface, RSD, Free diode, Screw connection
Order No.	<a href="#">8022901001</a>
Type	RSD 10 LP/LP
GTIN (EAN)	4032248060474
Qty.	1 pc(s).

Creation date March 29, 2021 10:41:16 PM CEST

Catalogue status 12.03.2021 / We reserve the right to make technical changes.

## RSD 10 LP/LP

Weidmüller Interface GmbH &amp; Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Technical data

## Dimensions and weights

Height	42 mm	Height (inches)	1.654 inch
Length	60 mm	Length (inches)	2.362 inch
Net weight	115 g	Width	70 mm
Width (inches)	2.756 inch		

## Temperatures

Storage temperature	-40...60 °C	Operating temperature	0...55 °C
---------------------	-------------	-----------------------	-----------

## Rated data UL

Certificate No. (cURus)	E141197
-------------------------	---------

## Connection data

Configuration	Through diode	Type of component	Diode 1N4007
---------------	---------------	-------------------	--------------

## Rating Data

Rated voltage (text)	230 V	Rated current per connection	1 A
Components	Diode	Value	1N4007
Max. recurring peak voltage	1,000 V		

## Insulation coordination (EN50178)

According to	DIN EN 50178	Rated insulation voltage	230 V
Surge voltage category	II	Pollution severity level	2
Pulse voltage test (1,2/50µs)	2 kV	Insulation test voltage	1.2 kVAC

## Connection field

Clamping range, max.	6 mm <sup>2</sup>	Clamping range, min.	0.13 mm <sup>2</sup>
Flexible with sleeve, max.	2.5 mm <sup>2</sup>	Flexible with sleeve, min.	0.5 mm <sup>2</sup>
Flexible, max. H05(07) V-K	4 mm <sup>2</sup>	Flexible, min. H05(07) V-K	0.5 mm <sup>2</sup>
Max. wire cross-section, AWG	AWG 12	Min. wire cross-section, AWG	AWG 26
Sleeve with plastic collar, max.	2.5 mm <sup>2</sup>	Solid, max. H05(07) V-U	6 mm <sup>2</sup>
Solid, min. H05(07) V-U	0.5 mm <sup>2</sup>	Stripping length	6 mm
Tightening torque, max.	0.6 Nm	Tightening torque, min.	0.5 Nm
Type of connection	Screw connection		

## Classifications

ETIM 6.0	EC002780	ETIM 7.0	EC002780
ECLASS 9.0	27-14-11-52	ECLASS 9.1	27-14-11-52
ECLASS 10.0	27-14-11-52	ECLASS 11.0	27-14-11-52

## Approvals

Approvals



ROHS	Conform
UL File Number Search	E141197

Creation date March 29, 2021 10:41:16 PM CEST

Catalogue status 12.03.2021 / We reserve the right to make technical changes.

**Data sheet****RSD 10 LP/LP**

**Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 26  
D-32758 Detmold  
Germany

[www.weidmueller.com](http://www.weidmueller.com)

**Technical data****Downloads**

Approval/Certificate/Document of  
Conformity

[Declaration of Conformity](#)

Engineering Data

[WSCAD](#)

Product Change Notification

[20200929 Technical change to RSX LOETST. LP, RSD and RSD AK families](#)

**Data sheet**

**RSD 10 LP/LP**

**Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 26  
D-32758 Detmold  
Germany

[www.weidmueller.com](http://www.weidmueller.com)

**Drawings**

