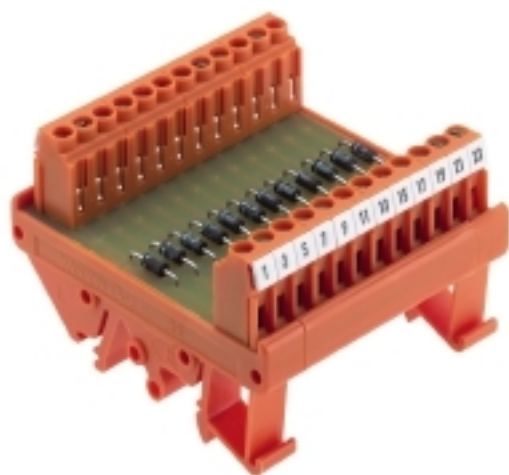


RSD 20 LP/LP**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Similar to illustration

Interfaces with diodes for surge voltage protection, lamp testing or protection against reversed polarity.

General ordering data

Version	Interface, RSD, Free diode, Screw connection
Order No.	8022911001
Type	RSD 20 LP/LP
GTIN (EAN)	4032248122332
Qty.	1 pc(s).

RSD 20 LP/LP

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data

Dimensions and weights

Height	42 mm	Height (inches)	1.654 inch
Length	120 mm	Length (inches)	4.724 inch
Net weight	187 g	Width	70 mm
Width (inches)	2.756 inch		

Temperatures

Storage temperature	-40...60 °C	Operating temperature	0...55 °C
---------------------	-------------	-----------------------	-----------

Rated data UL

Certificate No. (cURus)	E141197
-------------------------	---------

Connection data

Configuration	Through diode	Type of component	Diode 1N4007
---------------	---------------	-------------------	--------------

Rating Data

Rated voltage (text)	230 V	Rated current per connection	1 A
Components	Diode	Value	1N4007
Max. recurring peak voltage	1,000 V		

Insulation coordination (EN50178)

According to	DIN EN 50178	Rated insulation voltage	230 V
Surge voltage category	II	Pollution severity level	2
Pulse voltage test (1,2/50µs)	2 kV	Insulation test voltage	1.2 kVAC

Connection field

Clamping range, max.	6 mm ²	Clamping range, min.	0.13 mm ²
Flexible with sleeve, max.	2.5 mm ²	Flexible with sleeve, min.	0.5 mm ²
Flexible, max. H05(07) V-K	4 mm ²	Flexible, min. H05(07) V-K	0.5 mm ²
Max. wire cross-section, AWG	AWG 12	Min. wire cross-section, AWG	AWG 26
Sleeve with plastic collar, max.	2.5 mm ²	Solid, max. H05(07) V-U	6 mm ²
Solid, min. H05(07) V-U	0.5 mm ²	Stripping length	6 mm
Tightening torque, max.	0.6 Nm	Tightening torque, min.	0.5 Nm
Type of connection	Screw connection		

Classifications

ETIM 6.0	EC002780	ETIM 7.0	EC002780
ECLASS 9.0	27-14-11-52	ECLASS 9.1	27-14-11-52
ECLASS 10.0	27-14-11-52	ECLASS 11.0	27-14-11-52

Approvals

Approvals



ROHS	Conform
UL File Number Search	E141197

Creation date March 29, 2021 10:41:21 PM CEST

Catalogue status 12.03.2021 / We reserve the right to make technical changes.

RSD 20 LP/LP

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data

Downloads

Approval/Certificate/Document of
Conformity

[Declaration of Conformity](#)

Engineering Data

[WSCAD](#)

Product Change Notification

[20200929 Technical change to RSX LOETST. LP, RSD and RSD AK families](#)

RSD 20 LP/LP

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany

www.weidmueller.com

Drawings

