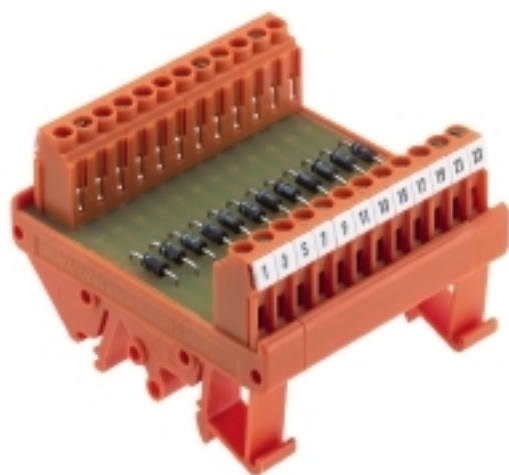


RSD 40 LP/LP**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Similar to illustration

Interfaces with diodes for surge voltage protection, lamp testing or protection against reversed polarity.

General ordering data

Version	Interface, RSD, PLC digital I/O module, Screw connection
Order No.	8022921001
Type	RSD 40 LP/LP
GTIN (EAN)	4032248182718
Qty.	1 pc(s).

RSD 40 LP/LP

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data

Dimensions and weights

Height	42 mm	Height (inches)	1.654 inch
Length	220 mm	Length (inches)	8.661 inch
Net weight	358 g	Width	70 mm
Width (inches)	2.756 inch		

Temperatures

Storage temperature	-40...60 °C	Operating temperature	0...55 °C
---------------------	-------------	-----------------------	-----------

Rated data UL

Certificate No. (cURus)	E141197
-------------------------	---------

Rating Data

Rated voltage (text)	230 V	Rated current per connection	1 A
Max. recurring peak voltage	1,000 V		

Insulation coordination (EN50178)

Rated insulation voltage	230 V	Surge voltage category	II
Pollution severity level	2	Pulse voltage test (1,2/50µs)	2 kV

Connection field

Clamping range, max.	6 mm ²	Clamping range, min.	0.13 mm ²
Flexible with sleeve, max.	2.5 mm ²	Flexible with sleeve, min.	0.5 mm ²
Flexible, max. H05(07) V-K	4 mm ²	Flexible, min. H05(07) V-K	0.5 mm ²
Max. wire cross-section, AWG	AWG 12	Min. wire cross-section, AWG	AWG 26
Sleeve with plastic collar, max.	2.5 mm ²	Solid, max. H05(07) V-U	6 mm ²
Solid, min. H05(07) V-U	0.5 mm ²	Stripping length	6 mm
Tightening torque, max.	0.6 Nm	Tightening torque, min.	0.5 Nm
Type of connection	Screw connection		

Classifications

ETIM 6.0	EC002780	ETIM 7.0	EC002780
ECLASS 9.0	27-14-11-52	ECLASS 9.1	27-14-11-52
ECLASS 10.0	27-14-11-52	ECLASS 11.0	27-14-11-52

Approvals

Approvals



ROHS	Conform
UL File Number Search	E141197

RSD 40 LP/LP

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data

Downloads

Approval/Certificate/Document of
Conformity

[Declaration of Conformity](#)

Engineering Data

[WSCAD](#)

Product Change Notification

[20200929 Technical change to RSX LOETST. LP, RSD and RSD AK families](#)

RSD 40 LP/LP

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany

www.weidmueller.com

Drawings

